

Fluke Biomedical.
Trusted for the measurements that matter.

# Trusted for the measurements that matter.

Fluke Biomedical leads the world in the design and manufacture of biomedical test and simulation products. We achieved our leadership position by being the company customers can rely on. Reliability is the linchpin of our identity, and our greatest asset.

### What does Fluke Biomedical reliability look like?

# Best-in-class service and sales support programs

When you invest in the best products, you deserve the best support. Fluke Biomedical has several world-class service centers, including the world's largest commercial laboratory. These centers are capable for servicing over 1000 different products with product and firmware updates, NIST-traceable calibration, and 90-day warranty repairs.

Additionally, the global Fluke Biomedical customer service teams are on-call to handle all your product specification, pricing and delivery questions. Our teams work closely with our field sales representatives to ensure the needs of each individual customer are addressed.

# Unbeatable product quality—rugged, accurate and safe

Fluke Biomedical's benchmark quality operates to the most rigorous standards in the industry, including compliance with ISO 9001:2000, ISO 13485:2003, OSR and NRC/ Part 50, Appendix B/Part 21 and adheres to ISO 17025:2005, ANSI Z540, Mammography MOSA and CNSC. Many of the products are CE-marked and CSA-certified. In addition, the Global Calibration Laboratory holds its NVLAP Lab Code 200566-0 certification and is traceable to both the NIST and PTB.

# Globally available product and application training

Fluke Biomedical is proud to offer no-cost training on medical device performance and safety testing, documenting for regulatory compliance, productivity improvement and effective use of test instruments. Our training center is organized into medical device testing categories, and includes webinars, training modules, instructional videos and app notes.



# **Featured Products Catalog**





### **Biomedical Test and Measurement**



















### **Imaging and Therapy Quality Assurance**



### **Radiation Safety**



### Service, Calibration and misc.

CarePlans	32
Service information	33
Calibration information	
Ordering information	
Oracing information	0 -1

For a complete listing of Fluke Biomedical products and services, please visit our website at www.flukebiomedical.com.

# Ansur

### **Test Automation Software**



How well do your PM inspection and post-repair performance testing processes eliminate sources of human error?

Wish that all technicians would document results the same way? Do you have enough time to complete all PM inspection and repair work on your shelf?

#### Ansur offers a solution:

Repeatability—Creates standard work so everyone tests the same way every time.

Quality—Can automatically configure and collect data from the compatible test devices to minimize human error and save time.

**Productivity**—Ensure that the amount of time required to perform testing is uniform and therefore, predictable by using ready-to-use and customizable test templates. The Ansur test automation system collects all the observe-andrecord manual entries as well as automated measurements from compatible simulators and performance analyzers from Fluke Biomedical.

### **Automate with Ansur**

Look for this logo in the Fluke Biomedical product catalog to see where test automation can benefit you.

# **Key features**

- Allows for creation and management of custom electronic test protocols to eliminate dependence on service manuals
- Guides users through stepwise testing process to ensure standardized testing
- Generates test report (PDF or MTR) per requirements with needed level of data to ensure compliance
- Enables the use of personalized pictures, illustrations and graphs to facilitate proper testing with ease
- Automatically assesses pass/ fail against test limits specified by global standards or organizations
- 21CFR Part 11 compliant. Users can create their own signature and sign templates and results. (This feature can be disabled)
- Authorization levels can be assigned to manage level of access to software. Levels include User, Author and Administrator (This feature can be disabled)
- Reduces test time per medical device, tests multiple devices simultaneously, and performs multiple PM tests in a single procedure
- Offers easy data traceability with electronic archival and printing of detailed records
- Data extraction offers trending, analysis and reporting capability

# **Specifications**

PC hardware	Intel® Pentium® 4 2.0 GHz FSB @400 MHz or faster processor
requirements	
	512 MB of RAM Microsoft® operating system: Windows® 2000, Windows XP, Windows Vista, Windows 7 or Windows 8
	50 MB of available hard drive for software • Hard drive space (from 100 k to several megabytes) for result and template files
	Net framework version 2.0 or newer
PC software requirements—	This software is required on the central PC (for a network configuration) or each PC (for a nonnetworked configuration):
with electronic signature	Microsoft SQL® Server 2005
Signature	Express Ansur Executive Server
Other requirements	License key for each Fluke Biomedical simulator/ analyzer plug-in
	One or more Ansur-compatible Fluke Biomedical simulators or analyzers

For full specifications please visit www.flukebiomedical.com/ANSUR

"We used Ansur to create test sequences that match service manual procedures so every inspection is done the same way every time. We improved quality and uniformity by creating standard work."

-Robert Dorrian. TBS U.K. Telematic & Biomedical Services Ltd. Hope Hospital

# Impulse 7000DP

# **Defibrillator Tester/External Pacemaker Analyzer**



Biomedical



The Impulse 7000DP is a combination Defibrillator/Transcutaneous Pacemaker Analyzer that is portable, rugged, and easy-to-carry. It delivers any energy or waveform, properly tests all defibrillator and AED devices (including Shock Advisory), ensures proper loads used for testing, and delivers superior performance with accuracy measurements  $\pm~1~\%$  of reading +.01 J.

### Impulse 7010 Selectable Load Accessory



The 7010 Selectable Load Box replicates selectable impedance values and simulates user-selectable impedances as high as 200 ohms accurately, ensuring IEC 60601-2-4 compliance. The 7010 Load Box and Impulse 7000DP work together as a system to replicate all possible human variations and ensure patient safety.

# **Specifications**

### **Defibrillator Analyzer**

Safety standards	CE: IEC/EN61010-1 2nd Edition; Pollution degree 2, CAN/CSA-C22.2 No 61010-1; UL61010-1, C-Tick: Australian EMC		
Autoranged measurement	0.1 J to 600 J		
Accuracy	0.1 J to 360 J: ± 1 % of reading +0.1 J 360 J to 600 J: ± 1 % of reading +0.1 J, typical		
	Note: For pulsed bi-phasic defibrillator, specified accuracy is $\pm$ (1.5 % of reading + 0.3 J) on both ranges		
Load resistance	Resistance: 50 $\Omega$		
Accuracy	1 %, non-inductive (< 2 μH)		
Charge time	Range: 0.1 s to 100 s		
measurement	Accuracy: ± 0.05 s, typical		
Synchronization test	Delay time measurement		
(cardioversion)	Timing window: ECG R-wave peak to the defib pulse peak Range: -120 ms to 380 ms; measures timing from 120 ms prior to the R-wave peak to up to 380 ms following the R-wave peak  Timing window: ECG R-wave peak to the defib pulse peak		
	Automated defibrillator test ECG waves		
	Normal sinus: 10 BPM to 300 BPM in 1 BPM steps     Ventricular fibrilation: Coarse and fine		
	Monomorphic ventricular tachycardia: 120 BPM to 300 BPM in 1 BPM steps		
	Polymorphic ventricular tachycardia: Five types     Asystole		

For full specifications please visit www.flukebiomedical.com/7000DP

### **Key features**

- IEC 60601-2-4 compliance
- Lown, Edmark, trapezoidal, biphasic and pulsed-biphasic defibrillation technology compatibility
- AED compatibility
- 12-lead ECG simulation
- Ability to test external transcutaneous pacemakers (Impulse 7000 DP only)
- Internal pacer brand selections
- Flexible heart-rate settings (1 BPM step)
- DSP-based measurements for firmware and waveform upgrade
- Waveform capture, store and replay
- First-in-class accuracy ± 1% of reading + 0.1J
- Long lasting, rechargeable battery

# Included accessories

1626219 USB Computer Communication Cable 3028681 User Manual CD 3028662 Getting-Started Guide Battery Eliminator Country specific 2814980 Carrying Case 3156262 Defib Paddle Contact Plates

### **Optional accessories**

**3091370** Ansur Impulse 6000D/7000DP

**Impulse 7010** Defibrillator Selectable Load Accessory provides multiple loads of 25  $\Omega$ , 50  $\Omega$ , 75  $\Omega$ , 100  $\Omega$ , 125  $\Omega$ , 150  $\Omega$ , 175  $\Omega$ , and 200  $\Omega$  to comply with IEC 60601-2-4 standard\*

\*Compatible only with Impulse 7000DP

# Impulse 6000D

### **Defibrillator Analyzer**









If you don't require a pacemaker analyzer, the Impulse 6000D is your device. It is the quintessential defibrillator analyzer featuring the exact functionality of the 7000DP, but without pacemaker testing. It will deliver any energy or waveform (monophasic, biphasic, pulsed-biphasic) while properly testing all defibrillator and AED devices including Shock Advisory.

# **Defibrillator Analyzer**

Comparison guide

	1330905555	13333006668
Functions	Impulse 7000DP	Impulse 6000D
Accuracy (Energy measurement)	± 1 %	± 1 %
Default patient test load	50 Ω	50 Ω
External pacer tests	•	
Mono-, bi- and pulsed bi- phasic energy measurement	•	•
Non-inductive resistor	• (<2 µH)	• (<2 µH)
Protection of pacer input against accidental defibrillation	•	No; Unable to test pacers
Test variable patient loads	• (with 7010 Load Box)	
Selectable measurement algorithms, test loads for external transcutaneous pacemakers	•	
Capable of testing ECG	• (10-lead)	• (10-lead)
Ansur Automatic Testing Compatibility	•	•

For full specifications please visit www.flukebiomedical.com/6000D

### **Key features**

- Portable, rugged, easy to carry
- Intuitive user interface and backlight, easy-to-read display
- 10 independent ECG outputs that provide 12 lead combinations for standardized clinical signals
- Unique integrated posts for secure connections
- Optional Ansur test automation software to standardize testing procedures, capture waveforms and test results, and print and document test results
- Two-year extended warranty (no-cost extended warranty available after first-year calibration at any Fluke Biomedical authorized service center)

# Included accessories

1626219 USB Computer Communication Cable 3028681 User Manual CD 3028662 Getting-Started Guide Battery Eliminator Country specific 2814980 Carrying Case 3156262 Defib Paddle Contact Plates

### **Optional accessories**

**3091370** Ansur Impulse 6000D/7000DP

# **QA-ES III**

# **Electrosurgical Analyzer**









The QA-ES III is the easiest way to test all critical ESU functions and wirelessly\* download results to a PC. Its user-friendly interface guides you through tests, making it quick to collect all measurements, including vessel sealing, contact quality monitor (CQM), high frequency (HF) leakage, and output power distribution (single or continuous mode).

### **Specifications**

Modes of operation	
Continuous operation	Continuous measurement of power, current, peak-to-peak voltage (closed load only), and crest factor
Single operation	Single measurement after the set delay time of the ESU output of power, current, peak-to-peak voltage (closed load only), and crest factor
Power distribution	Tests impedance-sensing circuitry in "power guarantee functions in new-generation ESU. Applicable parameters—power, current, peak-to-peak voltage (closed load only) and crest factor—can easily be observed during the automatic, sequential output energy measurements.
RF leakage current	Provides connections and load configurations to measure HF leakage from both grounded and isolated equipment
СОМ	Test the "return electrode control quality monitoring" using the QA-ES internal loads

### **Key features**

- Test ESU functions with precise power, current, frequency, crest factor, and load resistance ranges
- Connect wirelessly via Bluetooth for easy record retrieval without interference or limitation by cables and wires\*
- All hardware and software necessary to complete preventive maintenance and troubleshooting is built in to the unit
- User-friendly interface: large buttons and LCD screen guide the user through test sequences
- Memory storage of up to 5,000 test records
- Complies to global standards, including ANSI/ AAMI and IEC

### Optional accessories

4635248 International dispersive lead (1/4 inch phono plug)
1909216 Test probe set—0.080 brass tip

4704312 Ansur Plug-in

the Qr Lie Internal found	
Variable: $0 \Omega$ , $10 \Omega$ , $20 \Omega$ , $25 \Omega$ to $2500 \Omega$ (by $25 \Omega$ ), $2500 \Omega$ to $5200 \Omega$ (by $100 \Omega$ ); Accuracy: $\pm 2.5 \%$ accuracy	
At 25% duty cycle (10 seconds on, 30 seconds off): $10~\Omega$ : $300~W$ , $20~\Omega$ to $2900~\Omega$ : $400~W$ , $3000~\Omega$ to $5200~\Omega$ : $200~W$ At $10~\%$ duty cycle (5 seconds on, 45 seconds off): $10~\Omega$ : $300~W$ , $20~\Omega$ to $2400~\Omega$ : $500~W$ , $2425~\Omega$ to $2900~\Omega$ :	
400 W, 3000 Ω to 5200 Ω: 200 W	
RMS: 0 mA to 5,500 mA; Accuracy: ±(2.5% of reading + 1 mA)	
Peak: 10 kV Peak to Peak; Accuracy: ±{10% of reading + 50 V}; Crest factor: 1.4 to 16.0 Defined as the ratio of Peak voltage to RMS voltage (Vpk /Vrms), using the larger of the 2 peaks (positive or negative)	
Loop current, RMS: 0 mA to 5500 mA; Accuracy: ±(2.5% of reading + 1mA)	
Fixed load: 200 Ω V; Accuracy; V Accuracy: ±2.5 % Power rating: 400 W; Additional fixed load: 200 Ω; Current, RMS: 0 mA to 5500 mA; Accuracy: ±(2.5 % of reading + 1 mA)	
Resistances: 0 $\Omega$ to 475 $\Omega$ (by 1 $\Omega$ ); Accuracy: 0 $\Omega$ to 10 $\Omega$ ±0.5 $\Omega$ , 11 $\Omega$ and above ±5%; Power rating: 0.5 W; Auto time interval: 1 to 5 seconds	
1 V per ampere of input current, typical	
Cut and coag	
USB device port: Micro B connector, full speed; Wireless port: 802.15, Speed: 115,200 baud	
Test records: 5,000; Non-volatile: retained through power cycling	
Monochrome 240 pixels x 64 pixels, 8 lines x 40 characters, white LED backlight	
100 V ac, 115 V ac, 230 V ac, 50 Hz / 60 Hz, universal input, 100 V/115 V: 20 VA, 230 V: 30 VA	
14.5 cm x 35 cm x 47 cm (5.75 in x 13.75 in x 18.5 in)	

<sup>\*</sup>Wireless capabilities not available in all countries. Ask your sales representative for more details.

7.5 kg (16.5 lbs)

Weight

For full specifications please visit www.flukebiomedical.com//QA-ES-III

# Infusion Device Analyzers Comparison Guide

	IDA-1S	IDA-5 4Ch	
Flow rate range	0.5 to 1000 ml/hr	0.5 to 1500 ml/hr	
Flow rate accuracy	1% of reading + 1 LSD for 16 ml/hr to 200 ml/hr & Vol. >20 ml or, 2% of reading + 1 LSD (Vol. >10 ml)	1% of reading + 1 LSD for 16 ml/hr to 200 ml/hr & Vol. >20 ml or, 2% of reading + 1 LSD (Vol. >10 ml)	
Volume measurement	0.06 to 999 ml	0 to 9999 ml	
Dual flow measurement	No	Yes	
Onboard graphing of pressure and flow	No	Yes	
Number of channels	1	4	
Min. volume detection	60 µl	60 µl	
AutoStart (Vol. detection)	Yes	Yes	
PCA measurements	No	Yes	
Occlusion test range	O to 45 PSI and equivalents in mmHg, Bar and kPa O to 45 PSI and equivalents in mmHg and kPa		
Occlusion test accuracy	1 % of full scale + 1 LSD	1 % of full scale + 1 LSD	
Back pressure	100 mmHg to + 300 mmHg		
Application software	Included HydrogrGraph™ Remote Control And Data Analysis Software  Included HydrogrGraph™ Remote Control and Data Analysis Software (included)		
Automation SW (Broadbase automation)	No	Yes	
Printer compatible	No	Plug 'n' Play	
Battery operated	Yes No		
Barcode scanner	No	Plug 'n' Play	
Keyboard	Touch-Screen	Plug 'n' Play	
Memory (on board)	Yes	Yes	
Trumpet curve	No	Yes	
Weight	2.7 lbs 11 lbs		

### IDA-5

# **Infusion Device Analyzer**





Representing 20 years of experience in infusion pump testing, the IDA-5 Infusion Device Analyzer can digitally verify a pump is administering flow, volume and boluses accurately, and the pump is alarming upon occlusion as expected. The IDA-5 has built-in automation allowing users to create custom test templates for quick, standardized testing with minimal user intervention. This automation bundle includes Ansur software for comprehensive testing.









### HydroGraph™ Graphics Software

Use the moving-color visual advantage of HydroGraph to troubleshoot up to four infusion pumps at once. Data is taken directly from the transducer and transmitted to HygroGraph. The flowing graphs provide an electronic means to display, store and recall flow patterns for comparison at a later date. Each test window can display instantaneous and average flow rates, cumulative, and bolus volumes; and occlusion pressure.

# **Specifications**

Flow rate measurement		
Range	0.1 ml/h to 1500 ml/h (2600 ml/h is shown)	
Accuracy	1 % of reading $\pm$ 1 LSD for flows of 16 to 200 ml/h for volumes over 20 ml; otherwise 2 % of reading $\pm$ 1 LSD for volumes over 10 ml under laboratory conditions.	
Volume measurement		
Range	0.06 ml to 9999 ml	
PCA bolus/dual flow measurement		
Minimum bolus volume	0.5 ml	
Resolution	60 ul increments	
Pressure measurement		
Range	0 psi to 45 psi and equivalents in mmHg and kPa	
Accuracy	1 % of full scale ±1 LSD under laboratory conditions	

For full specifications please visit www.flukebiomedical.com/IDA5

### **Key features**

- Tests up to four infusion pumps at the same time
- Customizable test templates for quick and standardized testing
- On-board and PC-based automation to fully test to IEC60601-2-24 testing requirements for quick standardized testing
- Compatible with virtually any type of infusion device
- Real time snap shots of flow and pressure for immediate issue recognition
- Instantaneous and average flow measurement of up to 1500 ml/hr
- Occlusion pressure measurements to 45 psi
- Single-flow, dual-flow (piggyback) and PCA testing
- Auto-start mode enables unit to begin testing only when fluid is detected to maximize accuracy
- Ability to automatically end flow measurement based on userdefined time, volume or both
- Convenient and easy data entry with plug-n-play, USB compatible, keyboard or barcode scanner
- Built-in memory to save test results for printing or downloading to computer

#### Included accessories

**4418071** Hydrograph Software and User Manual

4354014 20 ml syringe

4354038 3-way Luerlock

4354429 5-ft Plastic Drain Line

4354452 USB A-B Cable 2M

#### **Optional accessories**

**4354490** Optional Miniature Keyboard **4354503** Ansur Test Software, IDA-5 Plug-In License

4354532 One Channel Upgrade Option

Infusion Device Analyzers 9

### **IDA-1S**

### **Infusion Device Analyzer**



A unique mix of speed and technical precision, the IDA-1S is the ideal analyzer for quick reliable one-channel measurements while onthe-go.

It's a portable, battery-operated instrument that allows for speedy verification of infusion device performance.

The IDA-1S measures the flow rate and volume delivered, and the pressure generated in occlusions or blockages of the fluid line. The IDA-1S is based on sophisticated measurement technology trusted by biomedical professionals around the world.

It is easy to set up and requires little or no training to use. The IDA-1S can be used to test a wide variety of infusion pumps and an autostart feature simplifies syringe pump testing and other tests that have long startup times.

### **Key features**

- Integrated carrying handle and lightweight (2.7 lb) for easy portability
- Battery powered with up to 10 hours of continuous operation for on-the-go operation
- LCD touch screen for ease of use
- Average and instantaneous flow measurement
- Occlusion pressure measurements to 45 psi
- Maximize accuracy with Autostart mode enabling unit to begin testing only when fluid is detected
- Compatible with a wide variety of infusion pumps
- Based on technology that is proven and trusted worldwide
- On-board memory allows test results storage instantly
- Hydrograph graphical software to control unit, display results and print results via PC
- Global sales, service and support



# **Specifications**

Flow rate measurement		
Range	0.5 ml/h to 1000 ml/h	
Accuracy	1 % of reading $\pm 1$ LSD for flows of 16 ml/h to 200 ml/h for volumes over 20 ml; otherwise 2 % of reading $\pm$ 1 LSD for volumes over 10 ml under laboratory conditions	
Max test duration	10 hours on battery	
Volume measurement		
Range	0.06 ml to 999 ml	
Accuracy	$1~\%$ of reading $\pm~1$ LSD for flow rates of 16 ml/h to 200 ml/h for volumes over 20 ml; otherwise 2 $\%$ of reading $\pm~1$ LSD for volumes over 10 ml under laboratory conditions	
Max test duration	10 hours on battery	
Pressure measurement		
Range	O psi to 45 psi and equivalent in mmHg, Bar and kPa	
Accuracy	1 % of full scale $\pm$ 1 LSD under laboratory conditions	
Max test duration	10 hours on battery	

For full specifications please visit www.flukebiomedical.com/IDA1S

# Included accessories

**4418071** Hydrograph Software and Users Manual

4497350 20 ml syringe

**4480978** 3-way Luerlock

**4478942** Drain tube (1 m)

4541948 Micro-90 solution (225 ml)

1740487 USB data transfer cable

 ${\bf 2461300} \,\, {\bf Country-specific} \,\, {\bf adapters}$ 


4329971 Power Supply

4481150 NiMH replacement battery

# **Electrical Safety**

# Comparison guide



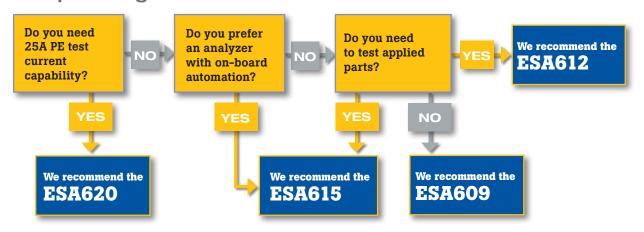


	ESA615	ESA612	ESA620	ESA609	601 Pro SeriesXL
Basic overview			<u> </u>		
Preferred analyzer for which standard?	IEC62353 and NFPA-99	ANSI/AAMI and NFPA-99	IEC60601-1 2nd, 3rd edition	ANSI/AAMI and NFPA-99	IEC60601-1 2nd edition
Automation inside	•				•
Ansur compatible	•	•	•		
Onboard memory	•	•			•
ECG simulation	•	•	•		•
Handheld	•	•		•	
GFCI protection	•	•	•	•	
DUT load current	•	•	•	•	•
20 A test capability	•	•	•	•	•
25 A test capability			•		•
Detailed comparison					
Test modes	Automated Manual if preferred	Manual Ansur-automatable	Manual Ansur-automatable	Manual	Automated (limited; manual testing required to meet newest standards)
Test loads	AAMI, IEC60601-1	AAMI, IEC60601-1	AAMI, IEC60601-1, IEC61010	AAMI, IEC6060-1	AAMI, IEC60601-1, IEC61010
Mains voltage measurement	All lines	All lines	All lines	All lines	All lines
PE test current	200 mA ac	200 mA ac	200 mA ac, 25 A ac	>200 mA dc	1 A ac, 10 A ac, 25 A ac
Leakage range	O μA tO 10,000 μA O μA to 20 mA (differential only)	O μA tO 10,000 μA O μA to 20 mA (differential only)	0 μA tO 10,000 μA 0 μA to 20 mA (differential or 61010 only)	0.0 µА to 1999.9 µА	O μA to 8000 μA to 16,000 μ (61010 only)
Patient auxiliary leakage lead selections	Any 1 to all	Any 1 to all	Any 1 to all RA-LL-LL-LA RA-LA		Any 1-5 to all V1-16 to all
MAP test voltage	100% of mains	100% of mains	110 % Or 100 %		110% of mains
Power supply (V ac)	120 or 230	120 or 230	120 or 230	90 to 264	120 or 230
Applied parts connections	5 banana safety jacks, Bj2ECG adapter, 1-to-10 Expander	5 banana safety jacks, Bj2ECG adapter, 1-to-10 Expander	10 insulated posts		10 banana safety jacks
Communication options	Wireless and Wired	Wired	Wired		Wired
Data entry options	Onboard keypad USB compatible keyboard, Barcode scanner	Onboard keypad			Onboard keypad PS/2 keyboard Barcode scanner
Printer port	Available via Ansur	Available via Ansur	Available via Ansur		Parallel
Dual lead testing	$\mu$ A/mV, V and Ω	μΑ/mV, V and Ω	μA/mV, V and Ω		μΑ/mV and V
Connectivity	USB	USB	USB		RS-232, parallel printer
Power cord	Removable	Removable	Removable		Removable

# **Electrical Safety Analyzer**









Additionally, its functional strap and featherweight design make it one of the most portable electrical safety analyzers in its class. Heavy-duty switches allow users to effortlessly change polarity and configuration of the neutral connection between open and closed, while push-button operation ensures fast transition between tests for complete basic testing in minutes. The ESA609 integrates all functions needed to test medical devices when patient lead testing is not required, including: line (mains) voltage, ground wire (protective earth) resistance, equipment current, leakage current and point-to point tests. Versatile to global electrical safety standards of choice, the ESA609 tests to ANSI/AAMI ES1, NFPA-99, and parts of IEC62353 and IEC60601-1.

# **Specifications**

Mains voltage measure	ement		
Range	90.0 V to 264.0 V ac rms		
Accuracy	± (2 % of reading + 0.2 V)		
Earth resistance			
Modes	Two wire		
Test current	> 200 mA dc		
Range	0.000 Ω to 20.000 Ω		
Accuracy	$\pm$ (1 % of reading + 0.010 $\Omega$ )		
Resistance tests	Earth resistance and point to point		
Equipment current			
Mode	AC RMS		
Range	0.0 A to 20.0 A		
Accuracy	± 5 % of reading + (2 counts or 0.2 Å, whichever is greater)		
Duty cycle	15 A to 20 A, 5 min. on/5 min. off 10 A to 15 A, 7 min. on/3 min. off 0 A to 10 A, continuous		
Leakage current			
Modes	True-rms		
Patient load selection	AAMI ES1-1993 Fig. 1 IEC 60601: Fig. 15		
Crest factor	Less than or equal to 3		
Ranges	0.0 μA to 1999.9 μA accuracy		
DC to 1 kHz	± 1 % of reading + (1 μA , whichever is greater)		
1 kHz to 100 kHz	$\pm$ 2.5 % of reading + (1 $\mu$ A, whichever is greater)		
100 kHz to 1 MHz	± 5 % of reading + (1 μA, whichever is greater)		
Leakage tests	Ground wire (earth) Chassis (enclosure) Direct equipment Point to point		

 Standards compliance include: ANSI/AAMI ES1, NFPA-99, and parts of IEC62353 and IEC60601-1

**Key features** 

- Test current consumption up to 20 A for a diverse set of medical devices
- All parameters needed for basic electrical safety testing: line (mains) voltage, ground wire (or protective earth) resistance, equipment current, ground wire (earth) leakage, chassis (enclosure) leakage, direct equipment leakage, and point to point leakage and resistance
- Global use: the ESA609 will operate at 120 V and 230 V
- Rugged: Rubberized case and Ingress Protection rating of IP30 help prevent damage when dropped
- User-friendly: Quick push-button operation for rapid testing
- Portable: Featherweight (1.5 lb) design, functional strap, and tilt stand make it easy for transportation and operation on-the-go (onsite or offsite)
- Rigorously tested for safety and reliability, with CE, CSA and Australia RCM in addition to Fluke quality

### Included accessories

**4370089** Operator's manual (Multilingual CD-ROM)

4370092 Safety sheet

3111008 USA/AUS/ISR Accessory Kit: test lead set, TP1 test probe set, AC285 alligator clip set (ESA T/L kit, USA)

3326842 Null post adapter

2248650 Carrying case

Line cord Country-specific power cord 3111024 EUR Accessory Kit: test lead set, TP74 test probe set, AC285 alligator clip set (ESA T/L kit, EUR)

### **Optional accessories**

2195732 15 A to 20 A adapter

# **Electrical Safety Analyzer**





Portable, lightweight and designed for operation in tight spaces, the ESA612 Electrical Safety Analyzer offers the functionality of a simulator, multimeter and analyzer in a single test tool. The versatility of the multifaceted ESA612 is further expanded with optional automation software, which speeds and simplifies testing and provides high-end productivity at software-level investment.





# **Specifications**

Voltage		
Range (mains voltage)	90 V ac to 132 V ac rms, 180 V ac to 264 V ac rms	
Range (accessible voltage)	0 V ac to 300 V ac rms	
Accuracy	± (2 % of reading + 0.2 V)	
Voltage tests	Mains and point-to-point	
Earth resistance		
Mode	Two terminal	
Test current	> 200 mA ac	
Range	0 Ω to 2 Ω	
Accuracy	$\pm$ (2 % of reading + 0.015 $\Omega$ )	
Resistance tests	Earth resistance and point-to-point	
Equipment current		
Mode	AC rms	
Range	0 A to 20 A	
Accuracy	± 5 % of reading + (2 counts or 0.2 A, whichever is greater)	
Duty cycle	15 A to 20 A, 5 min on/5 min off 10 A to 15 A, 7 min on/3 min off	
	O A to 10 A continuous	
Leakage current		
Modes*	AC + DC (true-rms)	
	AC only	
	DC only	
*Modes are available in all leakag	e tests with the exception of MAP leakages that are available only in true-rms	
Crest factor	≤ 3	
Ranges	Ο μΑ to 199.9 μΑ	
	200 µA to 1999 µA 2 mA to 10 mA	

For full specifications please visit www.flukebiomedical.com/ESA612

### **Key features**

- Large, easy-to-read display with adjustable contrast
- Human-factors-designed user interface
- Tilt stand design for stand-up testing in field environments
- Five applied parts jacks and easy ECG snap connection with optional expander box
- ECG waveform tests and duallead measurements combine the functionality of a simulator, multimeter and safety analyzer in a single test tool
- Replaceable mains fuses keep your unit in the field and out of the repair shop
- Internal memory for 100 test records
- USB connection for use with Ansur and Data Viewer software (for memory download to PC)

# Included accessories

**CD-ROM** Users Manual (multilingual) **Manual** Getting-Started Guide (hard copy, multilingual)

Cable Assembly Data Transfer Cable ESA612 Accessory Kit (country specific)

**2719-0154** 15 A to 20 A Adapter (US only)

ESA620-npa Null Post Adapter ESA612-2016 5-to-5 Banana Jack to ECG (BJ2ECG) Adapter

**9530-0075** Carry Case Detachable Power Cord (country specific)

# Included accessories for ESA612 with test automation

All of the above, plus:

ANSUR ESA612 Ansur TestAutomation Software ESA612 plug-in

#### **Optional accessories**

1903307 Retractable Test Leads 2242165 Ground Pin Adapter (US receptacle testing ground lug) 3392119 1210 Adapter Box Assembly 3454829 Ansur ESA612 Plug-In License Key

# **Electrical Safety Analyzer**



The automated ESA615 Electrical Safety Analyzer brings fast and simple testing to a portable analyzer perfect for use in the field and in facilities. Whether it is simple testing or comprehensive analysis, the ESA615 can do it all. The multifaceted device performs all primary electrical safety tests including line (mains) voltage, ground wire (protective earth) resistance, insulation resistance, device current and lead (patient) leakage tests.





# **Specifications**

Voltage			
Range (mains voltage)	90 V ac rms to 132 V ac rms, 180 V ac rms to 264 V ac rms		
Range (accessible voltage)	0 V ac rms to 300 V ac rms		
Accuracy	± (2 % of reading + 0.2 V)		
Voltage tests	Mains and point to point		
Earth resistance			
Mode	Two wire		
Test current	> 200 mA ac		
Range	0 Ω to 2 Ω		
Accuracy	$\pm$ (2 % of reading + 0.015 $\Omega$ )		
Resistance tests	Earth resistance and point to point		
Equipment current			
Mode	AC rms		
Range	0 A to 20 A		
Accuracy	$\pm$ 5 % of reading + (2 counts or 0.2 A, whichever is greater)		
Duty cycle	15 A to 20 A, 5 min on/5 min off 10 A to 15 A, 7 min on/3 min off		
	O A to 10 A continuous		
Leakage current			
Modes*	AC + DC (true-rms)		
	AC only		
	DC only		
*Modes are available in all leakag	e tests with the exception of MAP leakages that are available only in true-rms.		
Patient load selection (input impedance)	AAMI ES1-1993 Fig. 1, IEC 60601: Fig 15		
Crest factor	≤ 3		
Ranges	O μA to 199.9 μA 200 μA to 1999 μA 2 mA to 10 mA		

For full specifications please visit www.flukebiomedical.com/ESA615

### **Key features**

- On-board automation with automated test sequences for easy compliance to key global electrical safety standards (ANSI/AAMI ES-1 (NFPA-99), IEC62353 (VDE751), IEC60601-1 2nd and 3rd editions, and AS/NZS 3551)
- Portable, ergonomic design with an integrated handle and tilt stand
- Human-factors-designed user interface for streamlined testing
- ECG waveform tests and duallead measurements combine the functionality of a simulator, multimeter and safety analyzer in a single test tool
- Five applied parts jacks and easy ECG snap connection; optional expander box for up to 12-lead ECG testing
- Easy data entry through barcode, external keyboard or on-board keypad
- Wireless communication plus removable memory card for fast and convenient data storage and exchange
- Replaceable mains fuses keep your unit in the field and out of the repair shop
- Custom language selections include: English, French, German, Spanish, Italian and Portuguese

# Included accessories

CD-ROM Users Manual (multilingual)
MANUAL Getting Started Guide (hard copy, multilingual)

**Ansur Plug-in** CD with demo version **Data Transfer Cable** 

**USA Accessory Kit:** Test Lead Set, TP1 Test Probe Set, AC285 Alligator Clip Set (ESA T/L KIT USA)

15 - 20 A Adapter (2719-0154) Null Post Adapter (ESA620-NPA) 5-to-5 Banana Jack to ECG (BJ2ECG) Adapter (ESA612-2016) Carrying Case (9530-0075) Power Cord US (Line Cord)

# **Electrical Safety Analyzer**



**Biomedical** 













The multifaceted ESA620 Electrical Safety Analyzer performs all primary safety tests including mains voltage, protective earth resistance, insulation resistance, device current, earth, chassis, and patient leakages as well as several additional leakage tests to comply with standards of choice.

DSP technology offers better accuracy of leakage measurements throughout the ranges specified in the standards.

Equipped with ten safety-enhanced ECG posts, the ESA620 offers simulation of ECG and performance waveforms so both electrical safety and basic tests on patient monitors can be performed with a single connection. When used with the optional Ansur computer-based software plug-in, the ESA620 becomes automated. This allows for standardization of test procedures, capturing and storage of results, comparison to standard limits, and printing of reports thus enabling the sophisticated performance of the high-end electrical safety analyzers.

# **Specifications**

Voltage			
Range (mains voltage)	120 V model: 90 V ac to 132 V ac rms 230 V model: 180 V ac to 264 V ac rms		
Accuracy	± (2 % of reading + 1 V)		
Range (accessible voltage)	0 V ac to 300 V ac rms		
Accuracy	± (2 % of reading + 2 LSD)		
Voltage tests	Mains, Accessible, and Point to Point		
Earth resistance			
Modes	Two terminal or four terminal		
Test current	> 200 mA ac or 10 A ac to 25 A ac		
Ranges	0 Ω to 2 Ω		
Accuracy	$\pm$ (2 % of reading 0.015 $\Omega$ )		
Equipment current			
Mode	AC rms		
Range	0 A to 20 A		
Accuracy	$\pm$ 5 % of reading $\pm$ (2 counts or 0.2 Å, whichever is greater)		
Leakage current			
Patient load selection (input impedance)	AAMI ES1-1993 Fig 1 IEC 60601: Fig 15 IEC 61010: Fig A-1		
Crest factor	≤ 3		
Ranges	О µA to 199.9 µA 200 µA to 1999 µA 2.0 µA to 10.0 mA		
Frequency response	DC to 1 kHz 1 kHz to 100 kHz 100 kHz to 1 MHz		
Accuracy	± (1 % of reading + 1 μA or 1 LSD, whichever is greater) ± (2 % of reading + 1 μA or 1 LSD, whichever is greater) ± (5 % of reading + 1 μA or 1 LSD, whichever is greater)		

For full specifications please visit www.flukebiomedical.com/ESA620

### **Key features**

- Superior compliance with multiple standards: IEC60601-1(partial), IEC62353, VDE 751, ANSI/AAMI ES1:1993, NFPA-99, AN/NZS 3551, IEC61010
- Expanded leakage ranges through 10,000 µA
- Dual-lead resistance, leakage and voltage tests
- AC only, dc only and true-rms leakage readings
- 100 % and 110 % mains voltage for mains on applied parts (lead isolation) test
- DSP filter technology for improved accuracy in leakage measurements
- More applied parts selections
- ECG and performance waveforms
- Intuitive user interface
- Easy-to-use applied parts (ECG) connections
- Insulation posts on applied parts connections
- · Five different insulation tests
- Varying insulation test voltage 500 V dc and 250 V dc
- Two or (optional) four-wire ground wire resistance
- Optional Ansur plug-in software
- USB connection
- CE, C-TICK and CSA for USA and Canada
- RoHS compliance
- Optional Ansur test automation software to standardize testing procedures, capture waveforms and print and document test result

#### Included accessories

CD-ROM Users Manual

Manual Multilingual Getting Started

ESA620 Accessory Kit (country specific)

2719-0154 15 A to 20 A adapter (US only)

Soft Case Carry case Detachable Power Cord (country specific)

#### **Included accessories for ESA620** with test automation

All of the above, plus:

ANSUR ESA620 Ansur Test-Automation Software ESA620 plug-in Cable Assembly Data Transfer Cable

### Optional accessories

ANSUR ESA620 Ansur ESA620 Plug-In

# ProSim Vital Signs Simulator Family Comparison guide

		0000000000		BERRY .	ES O	202008	The Court
Functions	ProSim 8 + SPOT	ProSim 8	ProSim 4, ProSim 3, SPOT Light	ProSim 4	ProSim 3	ProSim 2	SPOT Light
ECG simulation	•	•	•	•	•	•	
Arrhythmia waveform selection	50+	50+	11	43	43	43	
Respiration simulation	•	•	•	•	•	•	
IBP simulation (channels)	2	2	4	1	4	2	
Temperature	•	•			•	•	
NIBP simulation	•	•	•	•			
Manometer (pressure meter)	•	•	•	•			
Leak test	•	•	•	•			
Pressure relief test	•	•	•	•			
Fetal ECG/IUP simulation	•	•			•		
Cardiac output	•	•			•		
Rainbow SET (Masimo) test	•						
Optical SpO <sub>2</sub>	•		•				•
Features							
Multi-parameter simulation	•	•	•	•	•	•	
Presets, auto sequences	•	•	•	•			
Multi-language	•	•	•	•			•
PC control software(Ansur)	•	•					
Direct data saving and printing	•	•					
Barcode scanning	•	•					
Wireless control	•	•					
Remote operation	•	•			•	•	
Communication	USB, USB, wireless	USB, USB, wireless	USB	USB	USB	USB	USB
Display	LCD color	LCD color	Touchscreen	Touchscreen	LCD gray	LCD gray	LCD gray
Battery life	9 hours	9 hours	4 hours	4 hours	8 hours	8 hours	10 hours

# ProSim 3 and ProSim 2

**Vital Signs Simulator** 













Don't need a comprehensive patient monitor tester? The ProSim 3 and ProSim 2 Vital Signs Simulators are clear choices for biomedical engineers and field service technicians that need a quality, portable device. Choose one of these modern vital signs simulators for preventive maintenance, troubleshooting and repair.

The ProSim 3 and 2 feature the perfect amount of features for testing in the field. We like to call it the just-right feature set, and it includes:

- ECG
- Pacemaker
- · Arrhythmia and performance testing
- Respiration
- Invasive blood pressure
- Temperature
- Cardiac output (ProSim 3 only)
- Fetal/maternal (ProSim 3 only)

# **Specifications**

Standard compliance	CE, CSA, C-tick, WEEE and RoHs		
ECG rate	30 BPM, 40 BPM, 45 BPM, 60 BPM, 80 BPM, 90 BPM, 100 BPM, 120 BPM, 140 BPM, 160 BPM, 180 BPM, 200 BPM, 220 BPM, 240 BPM, 260 BPM, 280 BPM and 300 BPM		
ECG accuracy	± 1% of setting		
Arrhythmia	43 waveforms		
Respiration rate	O (OFF), 15 BPM, 20 BPM, 30 BPM, 40 BPM, 60 BPM, 80 BPM, 100 BPM, 120 BPM		
Accuracy baseline	± 5%		
Blood pressure	4 channels		
Pressure accuracy	± (2% of setting + 2 mmHg), dc excitation only		
Temperature	0 °C (32 °F), 24 °C (75.2 °F), 37 °C (98.6 °F), 40 °C (104 °F)		
Temperature accuracy	± 0.1 °C		
Cardiac output	2.5, 5, 10 liters per minute ± 5 %		
Fetal/maternal	Fetal HR: 60 BPM, 90 BPM, 120 BPM, 140 BPM, 150 BPM, 210 BPM and 240 BPM		
	Fetal HR (IUP): 140 BPM, then varies		

For full specifications please visit www.flukebiomedical.com/ProSim

### **Key features**

- · Portable, multi-parameter patient simulators for evaluating the performance of patient monitors
- 20 % lighter and 25 % smaller than predicate technology
- Just-right feature set includes: ECG, pacemaker, arrhythmia and performance testing, respiration, invasive blood pressure, temperature, cardiac output (ProSim 3 only), fetal/ maternal (ProSim 3 only)
- 43 high-quality waveforms
- With four IBP channels, ProSim 3 can test even the highest acuity scenarios
- Stay connected ECG posts for secure lead connections
- Improved user interface and online Advantage Training demos
- Upgraded DIN connectors ensure consistency with the ProSim family; minimize cable compatibility issues
- · Field upgradeable, and easily paired with other devices for comprehensive testing

#### Included accessories

#### ProSim 2/3 Instruction Sheet (Multilingual)

4253822 ProSim 2/3 Users Manual CD 614487 Two 9-volt alkaline batteries (minimum eight hours continuous use) 2392173 IBP Cable, unterminated 2392199 3010-0289FG, CI-3 Cable Assembly (Cardiac Output Box; ProSim 3 only) 1671807 USB cable

2248623 ProSim 2/3 Carrying Case

### AC power cords

4219453 AC/DC Power Supply 769422 AC Power Cord (Schuko) 284174 AC Power Cord (USA) 769455 AC Power Cord (UK) 658641 AC Power Cord (Australia) 2200218 AC Power Cord (Denmark) 2200229 AC Power Cord (India) 2200241 AC Power Cord (Israel) 2198785 AC Power Cord (Italy) 769448 AC Power Cord (Switzerland)

### **Optional accessories**

2523334 YSI 400 Series (UT-4) 2199019 YSI 700 Series (UT-2) 4022300 Cardiac output switch for GE

# **ProSim 4 with SPOT Light**

# Vital Signs Simulator and SpO, Functional Tester



The ProSim 4 Vital Signs Simulator offers quick and simple one-tap testing for patient monitor performance checks and troubleshooting. Designed to get you in and out of most locations in 60 seconds, this quick-check device offers 12-lead ECG simulation, respiration, IBP and NIBP testing in the palm of your hand. Featuring specialized stay-connected ECG posts to ensure secure lead connections and no-hassle testing, the ProSim 4 is the perfect patient simulator for first-call patient monitor quality assurance and safety professionals.

The ProSim SPOT Light SpO<sub>2</sub> Tester is the first comprehensive SpO<sub>2</sub> tester to come in a handheld and easy-touse device. It's lightweight and flexible with three custom presets specially designed to make it the fastest and easiest to use device on the market for pulse oximeter functional testing.









# **Specifications**

Standard compliance	CE, CSA, C-Tick, RoHs	
ECG rate	30 BPM, 60 BPM, 80 BPM, 90 BPM, 120 BPM, 150 BPM, 180 BPM, 210 BPM, 240 BPM, 270 BPM, 300 BPM, and 320 BPM	
ECG accuracy	± 1% of setting	
Arrhythmia	11 waveforms	
Respiration rate	O (OFF), 10 BrPM to 100 BrPM in 10 BrPM steps	
Accuracy baseline	± 5 %	
Manometer (Pressure meter)	10 mmHg to 400 mmHg	
Manometer resolution	0.1 mmHg (for display purposes)	
Manometer accuracy	± (1% of reading + 1 mmHg)	
Invasive blood pressure	One channel	
Pressure accuracy	± (1 % of setting + 1mmHg), dc excitation only	
Temperature	0 °C (32 °F), 24 °C (75.2 °F), 37 °C (98.6 °F), 40 °C (104 °F)	

For full specifications please visit www.flukebiomedical.com/ProSim

### **Key features**

#### ProSim4

- ProSim 4 is a multi-function tester offering 12-lead ECG, respiration, IBP and NIBP simulation
- Touchscreen interface
- One-tap testing for most performance tests and checks
- · Easy quick-check patient monitor testing

### **SPOT Light**

- SPOT Light preset programs test any combination of saturation, heart rate, perfusion, transmission, artifact noise, and r-curve in 15 seconds or less
- Small, portable and lightweight
- Rechargeable battery lasts 10 hours minimum
- · Signal strength indicator
- SpO<sub>2</sub> saturation: 80%, 85%, 90%, 95%, 97%, 98%, 99% and 100%
- Heart rate: 30, 60, 80, 100, 120, 150 and 245 BPM
- Perfusion: 0.2%, 2% and 10%
- Transmission: dark/thick, normal and light/thin
- Artifacts: respiration and ambient light
- R-curves: Nonin, Masimo, Nellcor, Nihon Kohden, Mindray, GE, Philips, BCI

### Optional accessories

3984878 ProSim 4 Accessory Kit, includes: Unterminated IBP cable, HP-3 IBP cable, MQ-3 IBP cable, TK-1 IBP cable, Adult cuff Mandrel spacer block (3), Adult cuff Mandrel end block (2), Neonatal Mandrel, USB cable, Spare Battery pack, ECG Snap/banana adapter

2392328 Neonatal Cuff Mandrel 2392370 Adult Cuff Mandrel End Blocks (2 needed)

2392381 Adult Cuff Mandrel Spacer Blocks (3 needed)

4026551 ECG Snap Adapter 4 mm and 3.2 mm ECG Banana Adapter Converter Modules (international only)

# **ProSim 8**

# **Vital Signs Simulator**





The 8-in-1 ProSim 8 Vital Signs Simulator offers fast and comprehensive preventive maintenance (PM) testing for your entire patient monitor fleet. Designed to get you in and out of most PM locations in minutes, this multifunction simulator tests ECG (including fetal ECG and arrhythmias), respiration, temperature, IBP, cardiac output/cardiac catheterization, NIBP, SpO<sub>2</sub>, and is capable of testing Rainbow multi-wavelength waveforms. Featuring specialized stay-connected ECG posts for secure lead connections, physiologicallysynchronized pulses across all parameters, and customizable patient pre-sets and autosequences, the ProSim 8 provides unbeatably fast and easy complete monitor testing.

# **Specifications**

Normal-sinus-rhyth	ım waveform		
Normal sinus rhythm	12-lead configuration with independent outputs referenced to right leg (RL). Output to 10 universal ECG jacks, color-coded to AHA and IEC standards		
High-level output	0.5 V/mV ± 9	5% of the ECG amplitude setting available on a BNC	
Amplitude	0.05 mV to 0	0.5 mV (0.05 mV steps); 0.5 mV to 5 mV (0.25 mV steps)	
ECG rate	10 BPM to 3	60 BPM in 1 BPM steps	
ECG waveform selection	Adult (80 ms	s) or pediatric (40 ms) QRS duration	
ST-segment elevation		only0.8 mV to +0.8 mV (0.1 mV steps). teps: + 0.05 mV and - 0.05 mV	
Pacemaker wavefo	rm		
Pacer pulse	Amplitude	0 (off), $\pm$ 2, $\pm$ 4, $\pm$ 6, $\pm$ 8, $\pm$ 10, $\pm$ 12, $\pm$ 14, $\pm$ 16, $\pm$ 18, $\pm$ 20, $\pm$ 50, $\pm$ 100, $\pm$ 200, $\pm$ 500, and $\pm$ 700 mV for lead II (reference lead)	
Pacer pulse width	0.1 ms, 0.2 n	ns, 0.5 ms, 1 ms, and 2 ms $\pm$ 5 %	
Paced arrhythmias	Atrial 80 BPM		
	Asynchronous 75 BPM		
	Demand with frequent sinus beats		
	Demand with occasional sinus beats		
	Atrio-ventricular sequential		
	Noncapture (one time)		
	Nonfunction		
Arrhythmia			
Baseline NSR	80 BPM		
PVC focus	Left focus, standard timing (except where specified)		
Supraventricular arrhythmia	Atrial fibrillation (coarse or fine); atrial flutter; sinus arrhythmia; missed beat (one time); atrial tachycardia; paroxysmal atrial tachcardia; nodal rhythm; and supraventricular tachycardia		
Premature arrhythmia	Premature atrial contraction (PAC); premature nodal contraction (PNC); PVC1 left ventricular; PVC1 left ventricular, early; PVC1 left ventricular, R on T; PVC2 right ventricular; PVC2 right ventricular, early; PVC2 right ventricular, R on T; and multifocal PVCs		
Ventricular arrhythmia	iny; multiple tachycardia	or 24 per minute; frequent multifocal PVCs; bigeminy; trigem-PVCs (one-time run of 2, 5, or 11 PVCs); mono-ventricular (120 to 300 BPM in 5 BPM steps); poly-ventricular tachycardia ntricular fibrillation (coarse or fine); and asystole	

### **Key features**

- All-in-one complete monitor testing 80% smaller and 17 lbs (7.7 kilos) lighter than predicate technology
- Stay-connected ECG posts for easy/secure ECG snap and lead connections
- Custom SpO<sub>2</sub> r-curve for accurate testing of the latest oximetry technologies
- Static pressure linearity testing
- Repeatable NIBP simulation (± 2 mm Hg) for dynamic pressure repeatability testing
- Physiologically synchronized pulses across all parameters
- Barcode scanning and direct data capture, printing functionality
- Onboard, customizable patient pre-sets and auto sequences for fast/easy testing
- Multi-language user interface offers choice of language selection
- Integrated, easily replaceable, long-life battery
- Wireless communication for remote PC control of test device, as well as data transfer and automated regulatory reporting\*

\*You must have Ansur Test Executive version 2.9.6 or greater on your PC to communicate with the product.

### **Optional accessories**

2392199 CI-3 Cardiac Output Box 3408564 Mini-DIN to DIN IBP Adapter 3890640 NIBP Test Chamber 500 ML 4034627 Ansur Test Software ProSim 8 Plug-In

### Cable kits

3984910 ProSim 8 Accessory Kit (includes DIN to minDin adapter, HP/Philips Intellivue IBP cable, GE Marquette Eagle/Dash/Solar IBP cable, Welch Allyn Propag/SpaceLabs Ultraview IBP cable, USB wireless dongle, YSI400 series temperature cable, YSI700 series temperature cable, CI-3 Cardiac Output Box, spare battery pack)

**3984922** HP/Philips Intellivue Cable Set **3984968** GE Marquette Eagle/Dash/ Solar Cable Set

**3984946** ProSim 8 SpaceLabs Ultraview Cable set

3984979 Welch Allyn/Propaq Cable Set 3984993 Drager Infinity Cable Set 3985009 ProSim 8 Nihon Kohden Cable Set

# **ProSim 8**

# Vital Signs Simulator

Arrhythmia continued					
Conduction defect	First-, second-, or third-degree heart block; and right- or left-bundle-branch block				
Advanced cardiac life support	Shockable pulseless arrest rhythms	Ventricular fibrillation (coarse), ventricular fibrillation (fine), unstable polymorphic ventricular tachycardia			
	Non-shockable pulseless arrest rhythms	Asystole			
	Symptomatic bradycardia	Sinus bradycardia (< 60 BPM) 2nd degree AV block, mobitz type I 2nd degree AV block, mobitz type II Complete/3rd degree AV block Right bundle branch block Left bundle branch block			
	Symptomatic tachycardia: regular narrow-	Sinus tachycardia > 150 BPM			
	complex tachycardia (QRS < 0.12 seconds)	Supraventricular Tachycardia			
	Symptomatic tachycardia: regular wide-complex	Sinus tachycardia > 150 BPM			
	tachycardias (QRS ≥ 0.12 seconds)	Supraventricular tachycardia SVT with aberrancy			
	Irregular tachycardia	Atrial fibrillation (coarse and fine), atrial flutter, unstable monomorphic ventricular tachycardia (120 BPM to 300 BPM), torsade de pointes/polymorphic ventricular tachycardia (long QT interval)			
ECG Performance testing					
Amplitude	0.05 mV to 0.5 mV (0.05 mV steps)				
	0.5 mV to 5 mV (0.25 mV steps)				
Pulse wave	30 BPM, 60 BPM, with 60 ms pulse width				
Square wave	0.125 Hz, 2 Hz, 2.5 Hz				
Triangle wave	0.125 Hz, 2 Hz, 2.5 Hz	Uz 40 Uz 50 Uz 60 Uz 100 Uz and 150 Uz			
R-wave detection	0.05 Hz, 0.5 Hz, 1 Hz, 2 Hz, 5 Hz, 10 Hz, 25 Hz, 30 Waveform	Triangular pulse			
It-wave detection	Rate	30 BPM, 60 BPM, 80 BPM, 120 BPM, 200 BPM, and 250 BPM			
QRS detection	Rate	30 BPM, 60 BPM, 80 BPM, 120 BPM, 200 BPM, and 250 BPM			
Tall T-wave rejection	Waveform				
		T-Wave width 180 ms			
	T-Wave shape ½ sinewave				
	Rate 80 BPM				
ECG artifact					
Туре	50 Hz, 60 Hz, muscular, baseline wander, respiration				
Size	25%, $50%$ , $100%$ of the normal sinus R-Wave for	each lead			
Lead select	All, RA, LL, LA, V1, V2, V3, V4, V5, V6				
Fetal/Maternal ECG					
Fetal heart rate (fixed)	60 BPM to 240 BPM in 1 BPM steps				
Fetal heart rate (IUP)	140 BPM at beginning, then varies with pressure				
Intrauterine-pressure waveforms	Early deceleration, late deceleration and acceleration				
Wave duration	90 seconds, bell-shaped pressure curve, from 0 mmHg to 90 mmHg and returning to 0				
Invasive blood pressure	•				
Channels	2, each independently settable with identical parameters and are individually electrically isolated from all other signals				
Transducer sensitivity	5 (default) or 40 µV/V/mmHg				
Static pressure	- 10 to + 300 mmHg in 1 mmHg steps				
Pressure units	mmHg or Kpa				
Swan-Ganz sequence	Right atrium, right ventrical (RV), pulmonary artery				
Cardiac catheterization	Chambers Aortic, pulmonary valve and mitral valve				
Respiration artifact	Arterial, radial artery, and left ventricle 5 % to 10 % multiplication  Other 5 mmHg or 10 mmHg				
BP output	Circular DIN 5-Pin				
	1				


For full specifications please visit www.flukebiomedical.com/ProSim

# VT Gas Flow Analyzer Family Comparison guide



FLUKE ®

# Which gas flow analyzer is right for you?

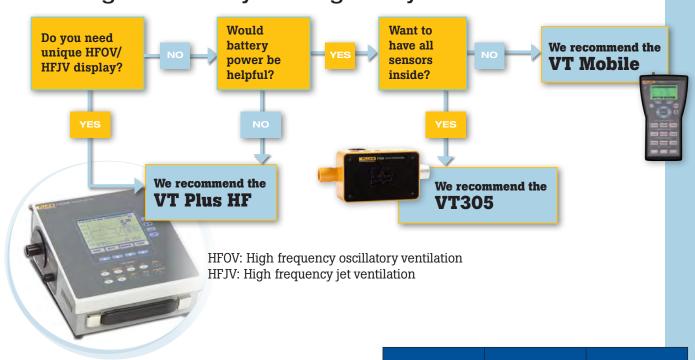

	VT PLUS HF	VT305	VT MOBILE
Sensors inside	•	•	
One flow-channel covers all flow measurements		•	
Four-button control		•	
Battery powered		•	•
Removable SD card memory		•	
Memory playback on-screen			•
Three waveform display	•		
High frequency ventilation measurements	•	•	
HFOV/HFJV display	•		
Factory preset gas types/density compensations	•	•	•
User-defined gas type/density compensations	•		•
RT200 mode	•		
Ansur VT Plug-In compatible	•	•	•
Test lung included in standard accessories		•	
Test lung optional	•	•	•
All parameters displayed on one screen	•		

# **VT PLUS HF**

### **Gas Flow Analyzer**



#### The premier gas flow analyzer.

The VT PLUS HF is Fluke Biomedical's premier general-purpose gas flow analyzer. With special display modes and bidirectional flow, the VT PLUS HF efficiently tests both conventional mechanical ventilators and high-frequency ventilators. Multiple special-function tests make trouble-shooting quick and efficient. Learning to use the VT PLUS HF is simple. Technicians control the unit using the user-friendly command system, or, if they're familiar with the RT-200, they can switch to a special control mode that uses RT-200-style commands.

# **VT305**

**Gas Flow Analyzer** 



### Simple. Portable. Efficient.

The VT305 Gas Flow Analyzer is the quick and easy way to test medical gas flow and pressure devices. This versatile tool evaluates the performance of a wide variety of devices and multiple ventilator parameters.

The VT305 features internal sensors to make connecting to medical devices a fast and easy process. The

four-button front-panel control makes switching to the best view of measured data simple. Onboard graphing capabilities allow users to view waveforms right on-screen, and measurements (numeric and waveform data) can be stored on the unit's 2 GB SD card with a simple button-touch. Users can upload these measurements to a computer for viewing or printing using the included Windows-compatible utility program.

# **VT MOBILE**

**Gas Flow Analyzer** 



#### Designed for portability.

The VT MOBILE is a compact and portable general purpose gas-flow analyzer designed to meet the needs of the traveling technician or engineer. This versatile tool evaluates the performance of a wide variety of medical gas-flow/pressure devices, and measures 16 ventilator parameters.

The base unit measures high- and low-flow ranges, volume, pressure and oxygen concentration. Additionally, the temperature and relative humidity option can be ordered separately to ensure the most accurate gas-flow measurements.

### **Key features**

#### VT PLUS HF

- Bidirectional flow, pressure, volume, oxygen concentration and pressure measurements
- Low- and high-pressure, and flow measurement capability
- Special HF mode—up to 900 BPM (15 Hz)
- RS-232 and printer ports
- Included Windows-compatible graphics software
- All 21 ventilator parameters displayed at once on one screen
- Operation by user-friendly VT PLUS HF command mode or special RT-200 command mode
- Minimum, maximum, average, absolute and graph for all parameters
- Multiple special-function tests for efficient troubleshooting

#### VT305

- Bidirectional flow, volume, vacuum, pressure and oxygen concentration measurements
- Display orients itself horizontally and vertically
- Four-button control
- Portable and compact
- USB for computer control
- 2 GB SD card memory for storing results
- Ansur compatible for streamlined standard work and reporting

### VT MOBILE

- Bidirectional flow (high- and low-flow ranges), volume, vacuum, pressure and oxygen concentration measurements
- 16 ventilator parameter measurements
- Trending and statistical analysis of all measured values
- Onboard graphical display
- Portable and compact
- RS-232 for computer control
- · Memory for storing results
- VT for Windows PC software
- Optional sensor assembly for temperature and humidity measurements

For full specifications please visit www.flukebiomedical.com//gasflowanalyzers

### INCU II™

# **Incubator/Radiant Warmer Analyzer**





Portable and intuitive-to-use, the INCU II Wireless\* Incubator/Radiant Warmer Analyzer simplifies testing and verifying the performance of baby incubators, transport incubators, and radiant warmers. Compliant with global IEC standards (IEC 60601-2-19, IEC 60601-2-20 and IEC 60601-2-21), the INCU II simultaneously measures temperature in six independent points, sound, humidity, and airflow.

\* Wireless capabilities not available in all countries. Ask your distributor for more

# **Specifications**

Measurement and test	
Air conduction peripheral temperature sensors for incubator (T1-T5)	5 sensors; Range: 0 °C to 50 °C; Accuracy: ±0.05 °C; Display resolution: 0.01 °C
Air convection temperature sensors for radiant warmers, sensors in pucks (black discs)	5 pucks; Range: 0 °C to 50 °C; Accuracy: ±0.2 °C; Display resolution: 0.01 °C
Relative humidity	Range: 0 % to 100 %; Accuracy: ±3 % RH (0 % to 100 %, non-condensing); Display Resolution: 0.1% RH
Airflow	Range: 0.2 m/sec to 2.0 m/sec at 35 C, 50 % RH; Accuracy: ±0.1 m/sec; Display Resolution: 0.01 m/sec
Sound pressure	30 dB(A) to 100 db(A); Accuracy: $\pm 5$ dB(A); Display resolution: 0.1 dB(A); IEC-61672-1 Class 2 from 31.5Hz to 8kHz
Surface temperature	Range: 5 °C to 60 °C; Accuracy: ±0.5 °C; Display Resolution: 0.05 °C
Skin temperature probe with reference thermometer	Range: 0 °C to 50 °C; Accuracy: $\pm 0.05$ °C; Display Resolution: 0.01 °C
Environmental	
Operating temperature	10 °C to 40 °C
Storage temperature	-20 °C to 60 °C
Humidity	10 % to 90 % non-condensing
Altitude	2000 m
Ingress protection rating	IP -20
General Information	
Display	LCD Color Display, 480 pixels x 272 pixels, 4.3" (10.9 cm), white LED backlight
Power adapter—universal voltage	Input: 100 V to 240 V with adaptors 50 Hz/60 Hz; Output: 15V dc, 1.3 A maximum
Rechargeable lithium-ion battery, internal	7.4 V, 7800 Ah, 58 Wh; 24 hour battery life with 30 second sample rate
Dimensions (LxWxH)	23 cm x 21 cm x 6 cm (9.0 in x 8.5 in x 2.5 in)
Total weight	3.9 kg (8.5 lb)

<sup>\*</sup>Wireless not available in all countries. Please talk to your local Fluke representative for information about wireless availability in your country.

For full specifications, please visit www.flukebiomedical.com/INCU\_II

### **Key features**

- Displays pass/fail indicators and real-time test results on a large LCD screen
- Portable and compact design, weighs less than 3 lbs (1.4 kg), or 9 lbs (3.9 kg) including radiant warmer pucks
- Creates personalized test sequences for automatic test completion in compliance with standards
- General Test enables flexibility in testing procedures and simplifies troubleshooting
- Simplifies test set-up with colorcoded temperature probes that match color of input ports
- Wireless\* functionality supports fast and convenient downloading of test results and data
- Able to choose from 10 different language interfaces

### **Optional Accessories**

**4721175** Skin Temperature Heater Assembly

# **Neonatal Test Equipment**

**NICU Test Solutions** 

# **Dale40 Phototherapy Radiometer**

Accuracy across blue spectrum.

The Dale40 measures light radiation in medical devices used to treat hyperbilirubinemia in newborns. It can accurately capture measurement across the blue color spectrum from 400-480 nanometers.



# Max O2 PLUS AE Oxygen Analyzer

Portable, on-the-go testing.

The Max O2 PLUS AE Oxygen Analyzer measures the oxygen concentration in infant incubators, ventilators, anesthesia systems, or oxygen tanks.

Portable and straightforward to use, it can capture measurements from 0 % to 100 % with  $\pm 3\%$  accuracy (actual oxygen level overfull operating range).



### **PS320 Fetal Simulator**

Test. Troubleshoot. Train.

At week 5, a fetus' heart starts beating, increasing to 155 to 195 beats per minute prior to birth. The strength and number of beats can be measured by a fetal electronic monitor is used to determine whether a fetus is in distress.

The PS320 Fetal Simulator mimics fetal and maternal heartbeats (ECG), along with uterine activity during labor to accurately test and troubleshoot fetal electronic monitors.



**Key features** 

### Dale40 Phototherapy Radiometer

- Intuitive to use with LCD screen
- Accurate to ±5% of full spectral range of 429-472 nanometers
- Measurement range of 0-1999 μW/cm2 with 1 μW/cm2
- Probe lens matches the cosine receiving function of human skin
- Portable, weighing less than 9 ounces with a 9V battery
- Verifies output power and provides continuous measurement of irradiation
- Saves costs by eliminating premature replacement of lamps

### Max O2 PLUS AE Oxygen Analyzer

- One-touch calibration with reminder
- Long battery life, approximately 5,000 hours
- Impact resistant and drip-proof
- External Max-250E Oxygen Sensor

### **PS320 Fetal Simulator**

- Mechanical heart for ultrasound simulation
- TOCO simulation, external or IUP
- Ultrasound simulation, including twins
- Maternal ECG simulation
- Fetal ECG, tracks ultrasound #1
- Internal (DECG) and external fetal ECG
- Uterine-activity selections
- Fetal beat-to-beat variability
- Periodic and non-periodic fetal ECG changes
- · Arrhythmia selections
- Compact, lightweight, pocketsize plastic housing
- Battery operated with status indications
- Special kits available with all required accessories and cables to test fetal monitors for specified manufacturers

For full specifications please visit www.flukebiomedical.com/neonatal

# **Digital Pressure Meters**



### **DPM2Plus**

### **Universal Pressure Meter**

The DPM2Plus Universal Pressure Meter is designed to measure the positive and negative pressures of medical devices in either liquid or gaseous form to assist in repair and quality control.



### DPM1B

### **Pnuematic Transducer Tester**

The DPM1B Pneumatic Transducer Tester is designed to measure the positive and negative pressures of medical devices in either liquid or gaseous form, and to generate pressure within the  $\pm$  300 mmHg range to assist in repair and quality control.



### DPM4

#### **Parameter Tester**

DPM4 Parameter Tester is a highly accurate meter for testing a wide range of medical devices. Key features include its lightweight, compact size and battery operation. DPM4 is ideal for the testing done as part of preventive maintenance or repair processes whenever measurement of pressure, flow, or relative humidity is required.



### **Key features**

#### DPM2Plus

- Low-priced pressure meter
- Great for all medical pressure device testing
- Optional cable for viewing pressure waveform on an oscilloscope (0.1 V/psi on all ranges except 100 psi, which is 0.01 V/psi)
- Voltage output accuracy: 5% of range
- Can be used with optional DALE22 Parabolic Flow Adapter Set

#### DPM1B

- Low-priced pressure-generator
- Great for all pressure transducers, not just IBP

### DPM4

- Mid-priced pressure and temperature tester
- Great for all medical device testing where low-pressure, temperature and low-flow measurements are required
- RS232 for computer control

	DPM1B	DPM2 Plus	DPM4 Model 1	DPM4 Model 2
Pressure generator (positive pressure and vacuum)	•			
Pressure measurement ±300 mmHg	•	•	•	•
5 Selectable pressure ranges standard		•		
2 Optional pressure ranges (select at time of purchase) G range: -700 to +5000 mmHg H range: 380 to 900 mmHg			•	•
Temperature measurement (-200 to 750 degrees C range)			•	•
Gas flow measurement (±750 ml range)				•
Gas flow measurement (requires DALE22 Parabolic Flow Adapter set) 10 to 250 l/min (interpretive chart) 10 to 75 l/min (interpretive chart) 5 % of reading accuracy		•		

For full specifications please visit www.flukebiomedical.com/PressureMeters

### 190M

# Medical ScopeMeter® Portable Oscilloscope



# Taking the guesswork out of troubleshooting

The 190M Medical ScopeMeter Portable Oscilloscope is a high-performance test tool built upon the legacy of Fluke and Fluke Biomedical oscilloscopes in partnership with real customers like you. The 190M is available with choice of two or four channels and offers an unprecedented level of performance, ruggedness and portability.

With the combined power of a high-performance oscilloscope, meter and paperless recorder in an easy-to-use test tool, the 190M is the one test tool you can rely on

to tackle just about any troubleshooting task in the field. To minimize downtime and repair costs, you need to get to the root cause of problems as quickly as possible. The 190M offers a number of unique features to help you quickly set up the 'scope and diagnose difficult problems like intermittent events, signal fluctuations or drift. Extend your arsenal of troubleshooting capabilities with the new Fluke Biomedical 190M Medical ScopeMeter Portable Oscilloscope, designed to meet the demands of field service professionals.

# **Key features**

- Two or four electrically-isolated inputs
- Fast sampling rate, up to 2.5 GS/s on two channels simultaneously with up to 400 ps resolution
- Deep memory: 10,000 samples per channel waveform capture so you can zoom in on the details
- Dedicated 5,000 count digital multimeter in two-channel model
- Quad meter measurements via scope BNC inputs in four channel model
- Connect-and-View™ trigger for intelligent, automatic triggering on fast, slow and even complex signals
- Frequency spectrum using FFT-analysis
- High-resolution, non-interlaced video
- Smart averaging
- ScopeRecord<sup>™</sup> roll mode gives 30,000 points per input channel and capture waveform sample data for up to 48 hours
- TrendPlot<sup>™</sup> trend measurement readings for up to 22 days
- Advanced automatic measurements, power (Vpwm, VA, W, PF) and time (mAs, V/s, w/s)
- Two USB ports make it easy to transfer data to a PC and store unlimited waveforms, screen captures and instrument setups on USB memory devices
- New high-performance Li-ion battery technology delivers the longest battery life on the market
- Charge spare battery door for quick swaps in the field
- Security slot locks down oscilloscope with Kensington lock while unattended
- Environmentally tested to meet IP-51 and withstand a 3 g vibration or 30 g shock



#### Included accessories

**VPS410-R** Voltage probe set, 10:1, 300 MHz, one set red

**VPS410-G** Voltage probe set, 10:1, 300 MHz, one set gray

**VPS410-B** Voltage probe set, 10:1, 300 MHz, one set blue

**VPS410-V** Voltage probe set, 10:1, 300 MHz, one set green

**EBC290** External battery charger for BP290 and BP291

**SW90W** FlukeView Software for Windows (full version)

**C290** Hard shell protective carrying case for 190 Series II

BP291 Li-Ion battery pack, 4800 mAh

MA190 Medical Accessory Kit

# **Optional** accessories

VPS410-R Voltage probe set, 10:1, 300 MHz, one set red

**VPS410-B** Voltage probe set, 10:1, 300 MHz, one set blue

**TL175** TwistGuard™ safety-designed test leads set (1 red, 1 black)

**EBC290** External battery charger for BP290 and BP291

**SW90W** FlukeView Software for Windows (full version)

**C290** Hard shell protective carrying case for 190 Series II

BP290 Li-Ion battery pack, 2400 mAh MA190 Medical Accessory Kit

For full specifications please visit www.flukebiomedical.com/190M

# **ASM-990**

# **Advanced Survey Meter**





The ASM–990 series can detect alpha, beta, gamma, or x-ray radiation within an operating range of 1  $\mu$ R/hr to 1 R/hr (1 to 5,000,000 CPM), depending on the selected probe (Geiger–Mueller, neutron, proportional counter, scintillation). With the proper probe combination, this meter can be used as a general survey meter, an area monitor, a wipe–test counter, and a contamination monitor.

Designed to meet the high-technology requirements of health physics, medical physics, and nondestructive testing applications, the ASM-990 Series is well-suited for a wide range of end users, including: Radiation safety officers (RSO), nuclear medicine laboratories, diagnostic x-ray and hospital emergency room technicians, environmental health physicists, and emergency responders.

### **Key features**

- Auto-scaling measurement of rate and dose simultaneously, with the capability to record peak rate
- Up to five different probes can be calibrated with one unit
- Survey Mode data-logging feature allows user to store up to five separate survey sequences
- Saved data can be uploaded to a PC via included Infrared Data (IrDA) transmitter
- Easy-to-use multifunction keypad for intuitive menu navigation
- Backlit analog/digital LCD display with full-range audio output capability
- Barcode scanner (optional)
- Auto power-down feature extends battery life

# **Specifications**

ASM-990 and ASM-992	
Operating modes	Rate
	Integrate
	Scaler (dual option): "Based On Measurement or "Based On Time
	Timed Peak Hold
	Data Logging
Operating rate ranges (dependent on selected probe)	μR/hr, mR/hr, R/hr, μrem/hr, mrem/hr, rem/hr, μSv/hr, mSv/hr, Sv/hr, CPM, CPS, DPM 99mTc, DPS131I, Bq 125I, kBq 123I, MBq 201Tl, μCi 67Ga, mCi18F, Ci 57Co
	μR, mR, R, μrem, mrem, rem, μSv, mSv, Sv, C (counts), kC, MC, D (distintigrations), kD 99mTc, MC 131I
	Complementary units in the integrade mode with the integrated time value in seconds
Accuracy (dependent on selected probe)	Within 10% of reading between 10% to 100% of full scale indication on any range, exclusive of typical energy dependence.
Detector	Accepts GM detectors and scintillation probes operating at high voltages between 500 V and 1300 V
Temperature range	-10 °C to 50 °C (14 °F to 122 °F)
Relative humidity	0 % to 95 %, non-condensing

For full specifications please visit www.flukebiomedical.com/ASM-990  $\,$ 

### Optional accessories

990-IR-USB USB Port IrDA Adapter 990CC Carrying Case 990WM Wall Mounting Bracket 990PH Probe Holder for 489-110D 990UPH Universal Probe Holder 990SH Soft-Sided Holster 990SA Shoulder Strap Assembly

**Note:** The shoulder strap assembly is only available for the ASM-993 and must be ordered with the instrument and factory installed.

### 451B

# Ion Chamber Survey Meter with Beta Slide




The auto-ranging 451B measures radiation rate and accumulated dose from beta, gamma and X-ray radiation sources. The 451B's site surveying capabilities make it well suited for a wide range of end users, including police and fire departments, X-ray manufacturers, government agencies, state inspectors, emergency response and HAZMAT teams, nuclear medicine labs, hospital radiation safety officers, and nuclear power workers.

The ion-chamber detector allows for a fast response time to radiation from leakage, scatter beams and pinholes. Additionally, the low-noise chamber bias supply provides for fast background settling time. A sliding beta shield serves as an equilibrium thickness for photon measurements and enables beta discrimination.

The digital display features an analog bar graph, 2.5 digit digital readout, low battery and freeze (peak hold) mode indicators, and an automatic backlight function. User controls consist of an ON/OFF button and a MODE button. The case is constructed of lightweight, high-strength materials and is sealed against moisture. The RS-232 interface can be connected directly to a computer for use with the Excel add-in for Windows® (451EXL), enhancing the functionality of the instrument. This software allows for data retrieval, user parameter selection and provides a virtual instrument display with audible (requires sound card) and visual alarm indication.

### Typical energy dependence

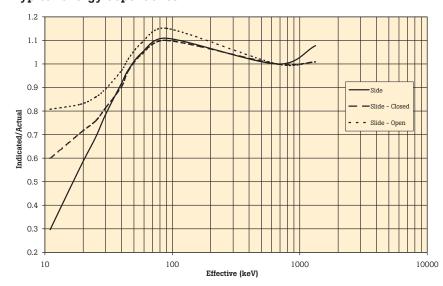

### **Key features**

- High sensitivity measurement of rate and dose simultaneously with the capability to record peak rate
- · Auto-ranging and auto-zeroing
- RS-232 communications interface with optional Windows-based Excel add-in for data logging
- Ergonomic, anti-fatigue handle with replaceable grip, wrist strap and tripod mount
- Programmable flashing LCD display and audible alarm
- Easily-accessible battery door (operated by two 9-volt alkaline batteries) on the outside of the bottom case
- Available with dose equivalent energy response (SI units)
- Shoulder strap and handle that can be easily decontaminated (Nuclear power plant specific unit)



# Ion Chamber Survey Meter with Beta Slide



# **Specifications**

Radiation detected	Beta above 100 keV, and Gamma above 7 keV			
Operating ranges				
	0 to 5 mR/h or 0 to 50 μSv/h			
	0 to 50 mR/h or 0 to 500 μSv/h			
	0 to 500 mR/h or 0 to 5 mSv/h			
	0 to 5 R/h or 0 to 50 mSv/h			
	0 to 50 R/h or 0 to 500 mSv/h			
Accuracy	Within 10 % of reading between			
	scale indication on any range, e	xclusive of energy response.		
Detector	Cambration source is Cs			
Detector	349 cc volume air ionization			
Chamber				
Chamber wall	246 mg/cm <sup>2</sup> thick phenolic	. 1 1 40 2 1		
Chamber window	6.6 mg/cm <sup>2</sup> mylar, protected by area	steel mesh, 46 cm <sup>2</sup> detection		
Beta slide	440 mg/cm <sup>2</sup>			
451B-DE-SI	In order to achieve energy response			
	measurements of H*(10) as requestions has been added to the back wall			
	and to the beta slide. With the E			
	measure skin dose at H*(0.07), a	and Deep Dose H*(10) with Beta		
	Shield closed			
Controls	ON/OFF and MODE			
Automatic features	Auto-zeroing, auto-ranging and	auto-backlight		
Response time	Range	Response		
	O to 5 mR/h (O to 50 μSv/h)	8 s		
	0 to 50 mR/h (0 to 500 μSv/h)	2.5 s		
	0 to 500 mR/h (0 to 5 mSv/h)	2 s		
	0 to 5 R/h (0 to 50 mSv/h)	2 s		
	0 to 50 R/h (0 to 500 mSv/h)	2 s		
Display LCD analog/digita	l with backlight			
Analog	100 element bar graph 6.4 cm lo major segments, each labeled w range of the instrument	ong. Bar graph is divided into 5 rith the appropriate value for the		
Digital	2.5 digit display is followed by a significant zero digit depending on the operating range of the instrument. The units of measurement are indicated on the display at all times. Digits are 6.4 mm (0.25 in) high. Low battery and freeze indicators are also provided on the display			
Modes				
Integrate mode	Operates continuously 30 secon			
		erformed even if the instrument		
T	is displaying in mR/h or R/h			
Freeze mode	Will place a tick mark on the ba	r graph display to hold on nit will continue to read and		
	the peak displayed value. The unit will continue to read and display current radiation values			
Environmental				
Power requirements	Two 9 V alkaline, 200 hours operation			
Warm-up time	One minute			
Temperature range	-20 °C to 70 °C (-4 °F to 158 °F)			
Relative humidity	0 % to 100 %, @ 60 °C			
Geotropism	Less than 1 %			
Dimensions (WxDxH)	10 cm x 20 cm x 15 cm (4 in x 8 in x 6 in)			
` ′		111 A O 1111		
Weight	1.11 kg (2.5 lb)			

For full specifications please visit www.flukebiomedical.com/451B

### **Optional accessories**

**451EXL** 451 Assistant for Excel, includes RS-232 interface cable **190HPS** Single Unit Carrying Case **450UCS** Check Source, <sup>238</sup>Uranium, 0.064 μCi, impregnated 2 x 2 in yellow card

**62-103** Check Source,  $^{\rm 137}\text{Cs},~10~\mu\text{Ci}.$  Flat disc, 1 inch diameter

Due to recent international airline shipping policies/restrictions, radioactive Check Source will not be shipped with the main unit outside US.

### 451P

# Pressurized µR Ion Chamber Survey Meter



The auto-ranging 451P features a pressurized ion chamber, providing enhanced sensitivity (µR resolution) and improved energy response to measure radiation rate and dose from X-ray and gamma sources. Originally designed to measure leakage and scatter around diagnostic X-ray and radiation therapy suites, the 451P's site surveying capabilities make it well-suited for a wide range of end users, including X-ray manufacturers, government agencies, state inspectors, biomedical technicians and maintenance technicians for airport baggage scanners.


The ion chamber detector allows for a fast response time to radiation from leakage, scatter beams

and pinholes. Additionally, the low-noise chamber bias supply provides for fast background settling time.

The digital display features an analog bar graph, 2.5 digit digital readout, low battery and freeze (peak hold) mode indicators, and an automatic backlight function. User controls consist of an ON/OFF button and a MODE button. The case is constructed of lightweight, high strength materials and is sealed against moisture. The RS-232 interface can be connected directly to a computer for use with the Excel add-in for Windows (451EXL), enhancing the functionality of the instrument. This software allows for data retrieval, user-parameter selection and provides a virtual instrument display with audible (requires sound card) and visual alarm indication.

### Typical energy dependence

 $^{16}\mbox{Nitrogen}$  gamma rays are 110 % to 120 % of indicated readings as determined at the University of Lowell.

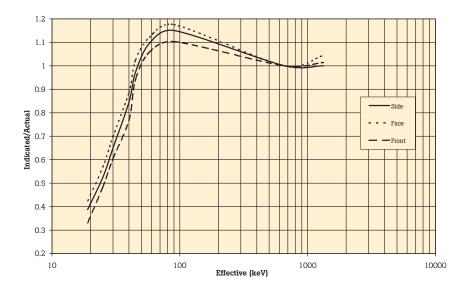

### **Key features**

- High sensitivity µR measurements of rate and dose simultaneously with the capability to record peak rate
- Ergonomic, anti-fatigue handle with replaceable grip, wrist strap and tripod mount
- Easily-accessible battery door (operated by two 9-volt alkaline batteries) on the outside of the bottom case
- RS-232 communications interface with optional Windows-based Excel add-in for data logging
- Available with dose equivalent energy response (SI units)
- Shoulder strap and handle that can be easily decontaminated (Nuclear power plant specific unit)





# Pressurized µR Ion Chamber Survey Meter

# **Specifications**

Radiation detected	Beta above 1 MeV, Gamma and x-rays above 25 keV		
Operating ranges	Dota above 1 Mev, Gamma and	an rays above 20 hev	
Operating ranges	0 to 500 yp/h or 0 to 5 yCy/h		
	O to 500 μR/h or O to 5 μSv/h		
	0 to 5 mR/h or 0 to 50 μSv/h 0 to 50 mR/h or 0 to 500 μSv/h		
	0 to 500 mR/h or 0 to 5 mSv/h	1	
	0 to 5 R/h or 0 to 50 mSv/h		
Accuracy	Within 10 % of reading between 10 % and 100 % of full		
	scale indication on any range, exclusive of energy resp Calibration source is <sup>137</sup> Cs		
Detector	Campiation source is Cs		
Chamber	220 gg yraluma proggurigad air ionigation shambar to aight		
Chamber	230 cc volume pressurized air ionization chamber to eight atmospheres or 125 psi		
Controls	ON/OFF and MODE		
Automatic features		·	
	Auto-zeroing, auto-ranging, and auto-backlight  Step increase.  Time to reach 90 %		
Response time Analog response time from	Step increase, background to	of final value	
10 % to 90 % of reading for	400 µR/h	4.8 s	
a full scale step increase is	4 mR/h	3.3 s	
dependent on operating range.	10 mR/h	4.3 s	
Response time for a step increase in radiation exposure	40 mR/h	4.5 s	
rate from background:	100 mR/h	2.7 s	
Tute from background.			
	1 R/h	2 s	
	4 R/h	2.7 s	
This table shows time measured from 10 % to 90 % of final value	Range	10 % to 90 %	
for a step increase or decrease	0 to 500 μR/h (5 μSv/h)	5 s	
in exposure rate such that a	O to 5 mR/h (50 μSv/h)	2 s	
range change does not occur.	0 to 50 mR/h (500 μSv/h)	1.8 s	
These values are the response	0 to 500 mR/h (5 mSv/h)	1.8 s	
times for the various ranges:	0 to 5 R/h (50 mSv/h)	1.8 s	
Analog/Digital display LCD w	ith backlight		
Analog	100 element bar graph 6.4 cm (2.5 in) long. Bar graph is divided into five major segments, each labeled with the appropriate value for the range of the instrument		
Digital	2.5 digit display is followed by a significant zero digit depending on the operating range of the instrument. The units of measurement are indicated on the display at all times. Digits are 6.4 mm (0.25 in) high. Low battery and freeze indicators are also provided on the display		
Modes			
Integrate mode	Operates continuously 30 seconds after the instrument has been turned on. Integration is performed even if the instrument is displaying in mR/h or R/h		
Freeze mode	Will place a tick mark on the bar graph display to hold on		
	the peak displayed value. The unit will continue to read and display current radiation values		
Environmental	,		
Power requirements	Two 9 V alkaline, 200 hours operation		
Warm-up time	Less than two minutes for initial operation when the instrument is in equilibrium with ambient temperature		
Temperature range	-20 °C to 50 °C (-4 °F to 122 °F)		
Relative humidity	0 to 100 %		
Geotropism	Negligible		
Dimensions (WxDxH)	10 cm x 20 cm x 15 cm (4 in x 8 in x 6 in)		
Weight	1.07 kg (2.4 lb)		
g	1 3 ()		

For full specifications please visit www.flukebiomedical.com/451P

# **Optional accessories**

**451EXL** 451 Assistant for Excel, includes RS-232 interface cable **190HPS** Single Unit Carrying Case **62-103** Check Source, <sup>137</sup>Cs, 10 μCi. Flat disc, 1 inch diameter

Due to recent international airline shipping policies/restrictions, radioactive "Check Source" will not be shipped with the main unit outside US.

# Fluke Biomedical CarePlans

# Priority services to keep you up and running



Look for the CarePlans logo in this catalog for products with available extended service and support plans. Fluke Biomedical's CarePlan packages offer comprehensive priority service and support to help you get the most out of your test equipment investments. Our CarePlan members enjoy priority bench service, extended warranties, value pricing on services, VIP technical support, expedited return shipping, productivity consultation services, educational training and more. Take advantage of CarePlan priority service and support and let us take care of you.



	Instrument CarePlan	Instrument CareMan
	-	The state of the s
Choose the best plan for you	Gold	Silver
First-on-bench priority service	•	•
Discounts on additional service requests	•	•
Turn-around time for repair	7 days	10 days
Turn-around time for calibration	3 days	3 days
Operational upgrades	•	•
Accredited calibration to manufacturer's specifications	•	•
Coverage options for up to 3 years	•	•
One-year extended warranty beyond your original factory warranty. No-cost repair service	•	
No cost repair service	•	•
No cost calibration	•	•
Coverage options for up to 3 years	•	•



# Global Service and Calibration

World-class facilities. World-class service.





Fluke Biomedical's Global Calibration Lab is NVLAP Lab Code 200566-0 accredited, adheres to ISO 17025:2005, ANSI Z540, Mammography MQSA, and CNSC, and is traceable to national and international standards.

Fluke Biomedical offers a variety of Service Options to meet your needs. These options include Asset-Management for pools larger than 150 units, On-Site calibration and Care Plan Options.

**Asset-Management:** Takes over your grueling task of instrument tracking and allows you to use your time more productively. Proper protocols are strictly followed, eliminating the problems with inspectors and audits that can result when other less-qualified labs perform the calibrations.

**On-Site Calibrations:** Minimizes downtime and is scheduled when convenient for you. Calibrations are to OEM requirements, completed OEM upgrades, and Automatic OEM updates.

Care Plan Options: Fluke Biomedical's Care Plan packages offer comprehensive priority service and support to help you get the most out of your test equipment investments. As a member enjoy priority service, extended warranties, value pricing on service, VIP technical support, xpedited return shipping, and more.

# **Calibration beam specifications**

Radionuclide calibrations				
Radionuclide sources	Minimum rate	Maximum rate		
2000 Ci Cs-137	0.02 R/hr	850 R/hr		
20 Ci Cs-137	0.1 mR/hr	4 R/hr		
4 Ci Cs-137	0.5 mR/hr	1 R/hr		
500 mCi Cs-137	0.04 mR/hr	150 mr/hr		
1300 Ci Co-60	0.01 R/hr	450 R/hr		
Collimated 2200 Ci Co-60	2575	3530		

### Calibrate the following

- Area monitors
- Barometers
- Blood pressure simulators
- Defibrillators/External pace Maker analyzers
- Densitometers
- Diode detectors
- Dosimeters
- Electrical safety analyzers
- Incubator analyzers
- Ion chambers
- IV pump analyzers
- kVp meters
- mAs meters
- Electrical multimeters
- Oscilloscopes
- Patient simulators
- Pressure meters/Parameter testers
- Radiation multimeters
- Sensitometers
- SpO<sub>2</sub> simulators/Analyzers
- Thermometers
- Test lungs
- Ultra sound analyzers
- Velometers
- Ventilators/Gas flow analyzers

#### **Contact information**

### Service Center/Repair/Calibration US

Fluke Biomedical a division of Fluke Electronics

6045 Cochran Road, Cleveland OH

44139-3303

Tel: 440-498-2564

Toll free: 800-850-4608 ext 2564 Email: globalcal@flukebiomedical.com

# Service Center/Repair/Calibration Europe

Fluke Biomedical Europe

Science Park Eindhoven 5110, 5692EC

Son, The Netherlands

Tel: +31 (40) 267 5435 Fax: +31 (40) 267 5436

Email: servicedesk@fluke.nl

www.flukebiomedical.com/service





# **Ordering information**

### Defibrillators

Impulse 6000D Defibrillator Analyzer IMPULSE 6000D United States, 120 V IMPULSE 6000D-01 Schuko IMPULSE 6000D-02 United Kingdom IMPULSE 6000D-03 Japan IMPULSE 6000D-04 Australia IMPULSE 6000D-05 India IMPULSE 6000D-06 Brazil



Impulse 7000DP Defibrillator/ Transcutaneous Pacemaker Analyzer

IMPULSE 7000DP United States, 120 V IMPULSE 7000DP-01 Schuko IMPULSE 7000DP-02 United Kingdom IMPULSE 7000DP-03 Japan IMPULSE 7000DP-04 Australia IMPULSE 7000DP-05 India

IMPULSE 7000DP-06 Brazil

Impulse 7000DP Defibrillator/ Transcutaneous Pacemaker Analyzer with test automation

TA-IMP7KDP United States, 120 V TA-IMP7KDP-01 Schuko TA-IMP7KDP-02 United Kingdom TA-IMP7KDP-03 Japan TA-IMP7KDP-04 Australia TA-IMP7KDP-05 India TA-IMP7KDP-06 Brazil

Impulse 7000DP Defibrillator/ **Transcutaneous Pacemaker Analyzer** with Impulse 7010 and test automation

TA-IMP7K/7010US United States, 120 V TA-IMP7K/7010SHK Schuko TA-IMP7K/7010UK United Kingdom TA-IMP7K/7010JPN Japan TA-IMP7K/7010AUS Australia TA-IMP7K/7010BRA Brazil

### Electrosurgery Analyzers

**QA-ES Series III Electrosurgery Analyzers** 



**QA-ES MK III** OA-ES MK III - O1 UK QA-ES MK III - 02 UK QA-ES MK III - 03 JAPAN QA-ES MK III – 04 Australia QA-ES MK III - 05 Brazil

QA-ES Series III Electrosurgery Analyzers with test automation

TA-OA-ES MK III US TA-QA-ES MK III Schuko TA-QA-ES MK III UK TA-QA-ES MK III Japan TA-QA-ES MK III Australia TA-QA-ES MK III Brazil

Non-wireless version are available with and without test automation.

# Infusion Pump Analyzers

IDA-5 One-Channel Infusion Device Analyzer

IDA-5/1 US120V United States, 120 V IDA-5/1 AUS250V Australia, 250 V



IDA-5/1 DEN250V Denmark 250 V IDA-5/1 SHK250V Shuko, 250 V IDA-5/1 ISR250V Israel, 250 V IDA-5/1 ITAL250V Italy, 250 V IDA-5/1 IND250V India, 250 V IDA-5/1 SWZ250V Switzerland, 250 V IDA-5/1 UK250V, United Kingdom, 250 V IDA-5/1 BRAZ230V, Brazil, 230 V **IDA-5 Two-Channel Infusion Device** 

IDA-5/2 US120V, United States, 120 V

IDA-5/2 AUS250V, Australia, 250 V

IDA-5/2 DEN250V, Denmark, 250 V IDA-5/2 SHK250V, Shuko, 250 V IDA-5/2 ISR250V, Israel, 250 V IDA-5/2 ITAL250V, Italy, 250 V IDA-5/2 IND250V, India, 250 V

IDA-5/2 SWZ250V, Switzerland, 250 V IDA-5/2 UK250V, United Kingdom, 250 V IDA-5/2 BRAZ230V, Brazil, 230 V

**IDA-5 Four-Channel Infusion Device** Analyzer

IDA-5/4 US120V, US, 120 V IDA-5/4 AUS250V, Australia, 250 V IDA-5/4 DEN250V, Denmark, 250 V IDA-5/4 SHK250V, Shuko, 250 V IDA-5/4 ISR250V, Israel, 250 V IDA-5/4 ITAL250V, Italy, 250 V IDA-5/4 IND250V, India, 250 V IDA-5/4 SWZ250V, Switzerland, 250 V IDA-5/4 UK250V, United Kingdom, 250 V IDA-5/4 BRAZ230V, Brazil, 230 V

IDA-1S One-Channel Infusion Device Analyzer

IDA-1S One-Channel Infusion Device Analyzer

### **Electrical Safety** Analyzers

ESA609 Electrical Safety Analyzer ESA609-US Electrical Safety Analyzer, **United States** 

ESA609-02-EUR Electrical Safety Analyzer, Europe

ESA609-01-FR Electrical Safety Analyzer France

ESA609-06-UK Electrical Safety Analyzer, United Kingdom ESA609-05-AUS Electrical Safety Analyzer, Australia

ESA609-07-SWISS Electrical Safety Analyzer, Switzerland

ESA609-03-ISR Electrical Safety Analyzer, Israel

ESA609-11-BRAZIL Electrical Safety Analyzer, Brazil 230 V

ESA609-12-INDIA Electrical Safety Analyzer, India

ESA609-09-Japan Electrical Safety Analyzer, Japan

ESA609-08-THAI Electrical Safety Analyzer, Thailand 230 V ESA609-US W/ADAPT, ESA609-US W/

ADAPT, Electrical Safety Analyzers, United

ESA612 Electrical Safety Analyzer

ESA612 United States, 115 V 20 A ESA612-02 Europe, 230 V

ESA612-01 France, 230 V

ESA612-03 Israel, 230 V

ESA612-05 Australia, 230 V ESA612-06 United Kingdom, 230 V

ESA612-07 Switzerland, 230 V

ESA612-08 Thailand, 230 V ESA612-09 Japan, 100 V

ESA612-10 North America, 220 V

TA-ESA612-US United States, 115 V 20 A w/Test AutomationTA-ESA612-EUR Europe, 230 V w/Test Automation

TA-ESA612-FR France, 230 V w/Test Automation

TA-ESA612-ISR Israel, 230 V w/Test Automation

TA-ESA612-AUS Australia, 230 V w/Test Automation

TA-ESA612-UK United Kingdom, 230 V w/Test Automation

TA-ESA612-SWI Switzerland, 230 V w/Test Automation

TA-ESA612-THAI Thailand, 230 V w/Test Automation

TA-ESA612-JAPAN Japan, 100 V w/Test Automation

TA-ESA612-NA220V North America, 220 V, w/Test Automation



**ESA615 Electrical Safety Analyzer** ESA615-US United States, 115 V **ESA620-02-EUR** Europe, 230 V ESA615-01-FR France/Belgium, 230 V ESA615-03-ISR Israel, 230 V ESA615-05-AUS Australia, 230 V ESA615-06-UK United Kingdom, 230 V ESA615-07-SWISS Switzerland, 230 V ESA615-08-THAI Thailand, 230 V ESA615-11-BRAZ Brazil, 230 V ESA615-09-JAPAN Japan, 100 V **ESA615-12-INDIA** India, 250 V ESA615-10-NA220V North America,

TA-ESA615-USA ESA615 United States 115 V w/Test Automation

TA-ESA615-EUR ESA615 Europe, 230 V w/Test Automation

TA-ESA615-FR ESA615 France/Belgium 230V w/Test Automation

TA-ESA615-ISR ESA615 Israel 230 V w/Test Automation

TA-ESA615-AUS ESA615 Australia 230 V w/Test Automation

TA-ESA615-SWISS ESA615 Switzerland 230V w/Test Automation

TA-ESA615-UK ESA615United Kingdom 230V w/Test Automation

TA-ESA615-THAI ESA615 Thai 230 V w/Test Automation

TA-ESA615-BRAZ ESA615 Brazil 230 V w/Test Automation

TA-ESA615-JAPAN ESA615 Japan 100 V w/Test Automation

TA-ESA615-12-INDIA ESA615 India 230V w/Test Automation

TA-ESA615-NA220V ESA615 North America 220 V w/Test Automation

**ESA620 Electrical Safety Analyzer** ESA620 United States, 115 V, 20 A

ESA620-02 Europe, 230 V

ESA620-01 France, 230 V

ESA620-03 Israel, 230 V

**ESA620-05** Australia, 230 V

ESA620-06 United Kingdom, 230 V

ESA620-07 Switzerland, 230 V ESA620-08 Thailand, 230 V

ESA620-10 230VBRAZ Brazil, 230 V TA-ESA620-USA ESA620 United States

115V 20A w/Test Automation TA-ESA620-EUR ESA620 Europe,

230 V w/Test Automation TA-ESA620-FR ESA620 France 230 V

w/Test Automation TA-ESA620-ISR ESA620 Israel 230 V

w/Test Automation TA-ESA620-AUS ESA620 Australia 230V w/Test Automation

TA-ESA620-SWI ESA620 Switzerland 230V w/Test Automation

TA-ESA620-UK ESA620 United Kingdom 230V w/Test Automation

# Vital Signs Simulators

ProSim 8 Vital Signs Simulators ProSim 8

 $\textbf{ProSim SPOT} \; \text{ProSim SpO}_2 \; \text{Test Module}$ ProSim RAINBOW ProSim Rainbow Sensor

ProSim 4 Vital Signs Simulators ProSim 4

ProSim 3 Vital Signs Simulators ProSim 3

ProSim 2 Vital Signs Simulators ProSim 2



SPOT Light SPOT Light SpO, Tester

# Gas Flow Analyzers

VTPLUS HE

VT+HF-US120 VT PLUS HF Gas Flow Analyzer United States, 120 V VT+HF/ACCULUNG-US VT PLUS HF

Gas Flow Analyzer/ACCU LUNG - United States

VT+HF-AUS250V VT PLUS HF Gas Flow Analyzer Australia, 250 V

VT+HF/ACCULUNG-AUS VT PLUS HF Gas Flow Analyzer/ACCU LUNG -Australia

VT+HF-SHK250V VT PLUS HF Gas Flow Analyzer Schuko, 250 V

VT+HF/ACCULUNG-SHK VT PLUS HF Gas Flow Analyzer/ACCU LUNG - Schuko VT+HF-UK250V VT PLUS HF Gas Flow Analyzer United Kingdom, 250 V

VT+HF/ACCULUNG-UK VT PLUS HF Gas Flow Analyzer/ACCU LUNG - United Kingdom

VT+HF-BRA250V VT PLUS HF Gas Flow Analyzer Brazil, 250 V

VT+HF/ACCULUNG-BRAZ VT PLUS HF Gas Flow Analyzer/ACCU LUNG - Brazil

#### VT Mobile

VTMOB/ENG Gas Flow Analyzer with English overlay

VTMOB/BRAZ Gas Flow Analyzer with Brazil overlay

VTMOB/CHI Gas Flow Analyzer with Chinese overlay

VT MOBILE FRA Gas Flow Analyzer with French overlay

VT MOBILE DEU Gas Flow Analyzer with German overlay

VT MOBILE ITA Gas Flow Analyzer with Italian overlay

VT MOBILE JPN Gas Flow Analyzer with Japanese overlay

VT MOBILE SPAN Gas Flow Analyzer with Spanish overlay



#### VT305

VT305 VT305 Gas Flow Analyzer TA-VT305 VT305 Gas Flow Analyzer with ANSUR BT Plug-In License

### **Neonatal Test** Equipment

Incubator/Radiant Warmer Analyzers INCU II-BT Incubator Analyzer, Wireless INCU II-NO BT Incubator Analyzer, Non-Wireless

**DALE40** Phototherapy Radiometer PS320 Fetal Simulator MAXO2+AE Oxygen Analyzer



# ScopeMeter® Medical Oscilloscopes

190M-2 Medical ScopeMeter Portable Oscilloscope

190M-4 Medical ScopeMeter Portable Oscilloscope

# Radiation Safety

990 Advanced Survey Meter 451B Ion Chamber Survey Meter with Beta Slide



451B-RYR Ion Chamber Survey Meter with Beta Slide and standard chamber 451B-DE-SI-RYR Ion Chamber Survey Meter with Beta Slide and dose equivalent chamber

451P Pressurized uR Ion Chamber **Survey Meter** 

**451P-RYR** Pressurized μR Ion Chamber Survey Meter with standard chamber 451P-DE-SI-RYR Pressurized μR Ion Chamber Survey Meter with dose equivalent chamber



**Biomedical** 



### Learn anytime, anywhere

To learn more, go to www.flukebiomedical.com/advantagetraining

### Connect with us



facebook.com/flukebiomedical



https://www.linkedin.com/company/fluke-biomedical



@flukebiomedical

### **Contact information**

Fluke Biomedical

11000111111010101010

6045 Cochran Road Cleveland, OH 44139-3303 U.S.A.

Fluke Biomedical Europe

Science Park Eindhoven 5110 5692EC Son, The Netherlands

For more information, contact us

In the U.S.A. (800) 850-4608 or Fax (440) 349-2307 In Europe/M-East/Africa +31 40 267 5435 or Fax +31 40 267 5436 From other countries +1 (440) 248-9300 or Fax +1 (440) 349-2307 Email: sales@flukebiomedical.com Web access:

www.flukebiomedical.com

Service Center/Repair/ Calibration US

Fluke Biomedical 6045 Cochran Road Cleveland 0H 44139-3303 Tel: 440-498-2564 Toll free: 800-850-4608 ext 2564 Email: qlobalcal@flukebiomedical.com

Service Center/Repair/ Calibration Europe

Fluke Biomedical Europe Science Park Eindhoven 5110 5692EC Son, The Netherlands Tel: +31 (40) 267 5435 Fax: +31 (40) 267 5436 Email: servicedesk@fluke.nl

Your authorized Fluke Biomedical distributor

### Fluke Biomedical.

Trusted for the measurements that matter.

Fluke Biomedical

6045 Cochran Road Cleveland, OH 44139-3303 U.S.A.

For more information, contact us at:

(800) 850-4608 or Fax (440) 349-2307 Email: sales@flukebiomedical.com Web access: www.flukebiomedical.com

©2016 Fluke Biomedical. Specifications subject to change without notice.All OEM company trademarks are implied. Printed in U.S.A. 3/2016 4123694e-en

Modification of this document is not permitted without written permission from Fluke Corporation.