



Wireless communication

instrument / PC
instrument / probe



Smart-plus system

Wireless or wired probes automatically
recognized when connected to the instrument.

Temperature probe
Pt100 SMART PLUS

for Class 200 – 300 portable instruments

Pt100 SP probes

General use	Measuring range	Accuracy*	t ₆₃	Ref.
-------------	-----------------	-----------	-----------------	------

Pt100 Class 1/3 DIN (IEC 751 guideline).
Stainless steel sheath.
ABS handle (from -40 to +85°C).

from -50 to +250°C

± 0.3% of reading ± 0.25°C

18
sec.


SPG 150 SP
SPG 250 SP
SPG 500 SP



Secured mini-DIN connector.



Retractable cable lg. 450 mm,
up to 2,4 m.

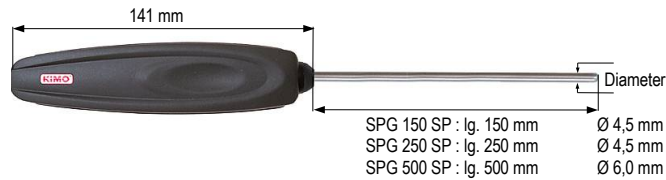

Pt100 Class 1/3 DIN (IEC 751 guideline).
Stainless steel sheath. ABS handle (from -40 to +85°C).

from -50 to +250°C


± 0.3% of reading ± 0.25°C

18
sec.

SPG 150 RF
SPG 250 RF



Wireless communication
Max. distance 10 m

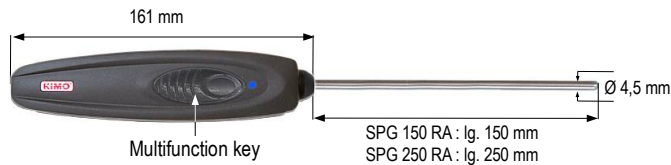

Ambient	Measuring range	Accuracy*	t ₆₃	Ref.
---------	-----------------	-----------	-----------------	------

Pt100 Class 1/3 DIN (IEC 751 guideline).
Stainless steel sheath with ambient end.
ABS handle (from -40 to +85°C).

from -50 to +250°C

± 0.3% of reading ± 0.25°C

16
sec.


SPA 150 SP



Secured mini-DIN connector.



Retractable cable lg. 450 mm,
up to 2,4 m.

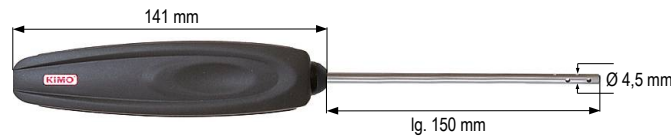

Pt100 Class 1/3 DIN (IEC 751 guideline).
Stainless steel sheath with ambient end.
ABS handle (from -40 to +85°C).

from -50 to +250°C



± 0.3% of reading ± 0.25°C

16
sec.





SPA 150 RF


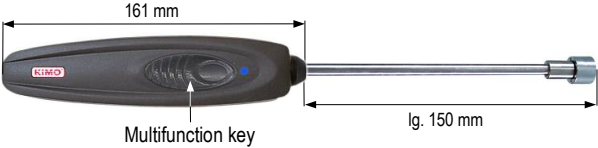



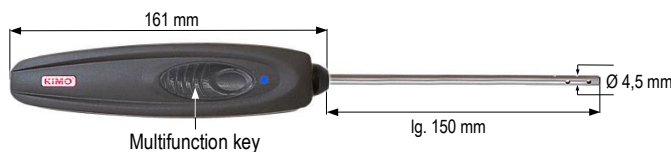



Wireless communication
Max. distance 10 m

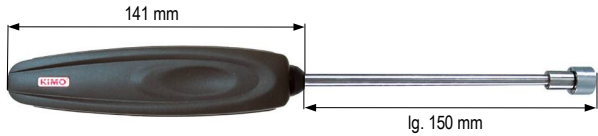

*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.


Contact	Measuring range	Accuracy*	t ₆₃	Ref.
Pt100 Class 1/3 DIN (IEC 751 guideline). Stainless steel sheath with circular end. ABS handle (from -40 to +85°C).	from -50 to +250°C	± 1% of reading ± 0.4°C	25 sec.	SPC 150 SP
 Secured mini-DIN connector.  Retractable cable lg. 450 mm, up to 2,4 m.	 141 mm lg. 150 mm	 15 mm 22 mm		

Pt100 Class 1/3 DIN (IEC 751 guideline). Stainless steel sheath with circular end. ABS handle (from -40 to +85°C).	from -50 to +250°C	± 1% of reading ± 0.4°C	25 sec.	SPC 150 RF
 Wireless communication Max. distance 10 m	 161 mm lg. 150 mm Multifunction key	 15 mm 22 mm		

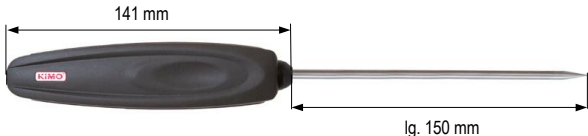Penetration	Measuring range	Accuracy*	t ₆₃	Ref.
Pt100 Class 1/3 DIN (IEC 751 guideline). Stainless steel sheath with pointer tip. ABS handle (from -40 to +85°C).	from -50 to +250°C	± 0.3% of reading ± 0.25°C	16 sec.	SPP 150 SP
 Secured mini-DIN connector.  Retractable cable lg. 450 mm, up to 2,4 m.	 141 mm lg. 150 mm	 15 mm		

Pt100 Class 1/3 DIN (IEC 751 guideline). Stainless steel sheath with pointer tip. ABS handle (from -40 to +85°C).	from -50 to +250°C	± 0.3% of reading ± 0.25°C	16 sec.	SPP 150 RF
 Wireless communication Max. distance 10 m	 161 mm lg. 150 mm Multifunction key	 15 mm		

Extension

General use	Ref.
Telescopic extension  Length 1 m.	RTS

*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.

www.kimo.fr

Distributed by :

EXPORT DEPARTMENT
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
 e-mail : export@kimo.fr

