





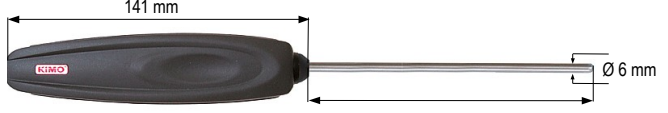






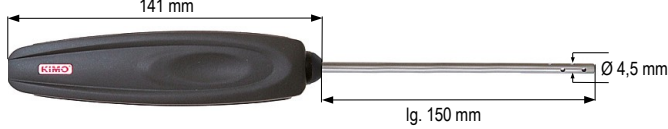



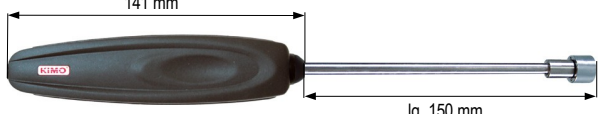



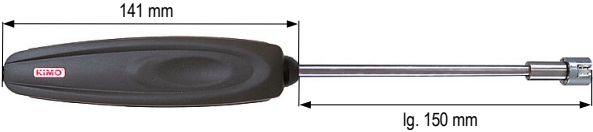







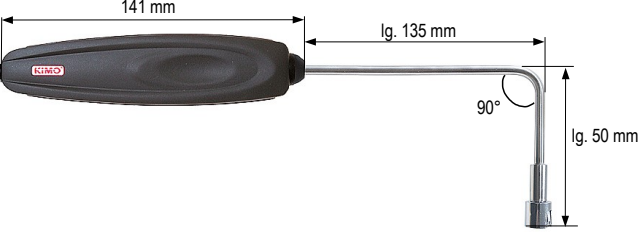



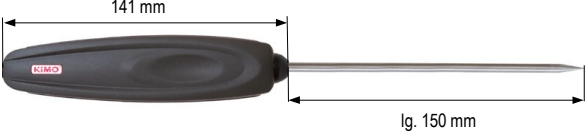






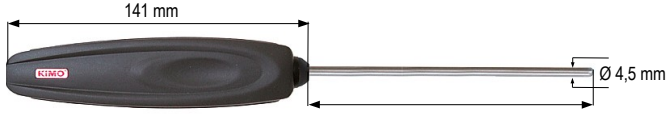



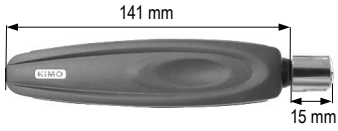Temperature probes
Thermocouple K and T
for Class 100 – 200 – 300 portable instruments

Thermocouple K

General use	Measuring range	t ₆₃	Ref.
<p>Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath. ABS handle (from -40 to +85°C).</p>  <p>Compensated miniature male plug</p>  <p>Retractable cable lg. 450 mm, up to 2,4 m.</p>  <p>141 mm Ø 4,5 mm</p> 	from -50 to +250°C	12 sec.	SKG 150 SKG 250
<p>Thermocouple K Class 1 (IEC 584-3 guideline). Inconel sheath. ABS handle (from -40 to +85°C).</p>  <p>Compensated miniature male plug</p>  <p>Retractable cable lg. 450 mm, up to 2,4 m.</p>  <p>141 mm Ø 6 mm</p> 	from -40 to +1100°C	12 sec.	SKG 500
<p>Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath with ambient end. Without handle.</p>  <p>Compensated miniature male plug</p>  <p>lg. 110 mm Ø 4,5 mm</p>  <p>10 mm</p>	from -40 to +80°C	10 sec.	SKA 110
<p>Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath with ambient end. ABS handle (from -40 to +85°C).</p>  <p>Compensated miniature male plug</p>  <p>Retractable cable lg. 450 mm, up to 2,4 m.</p>  <p>141 mm lg. 150 mm Ø 4,5 mm</p>  <p>10 mm</p>	from -50 to +250°C	10 sec.	SKA 150
<p>Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath with circular end. ABS handle (from -40 to +85°C).</p>  <p>Compensated miniature male plug</p>  <p>Retractable cable lg. 450 mm, up to 2,4 m.</p>  <p>141 mm lg. 150 mm</p>  <p>15 mm 22 mm</p>	from -50 to +250°C	25 sec.	SKC 150

■ Contact with lamella		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath. ABS handle (from -40 to +85°C).		from -50 to +250°C	4 sec.	SKCL 150
				
Compensated miniature male plug	Retractable cable lg. 450 mm, up to 2,4 m.			
■ Contact lamella without plunger		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Whithout plunger. ABS handle (from -40 to +85°C).		from -50 to +250°C	4 sec.	SKCL
				
Compensated miniature male plug	Retractable cable lg. 450mm, up to 2,4 m			
■ Angled contact with lamella		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath angled at 90°. ABS handle (from -40 to +85°C).		from -50 to +250°C	4 sec.	SKCLC 150
				
Compensated miniature male plug	Retractable cable lg. 450 mm, up to 2,4 m.			
■ Penetration		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Stainless steel sheath with pointer tip. ABS handle (from -40 to +85°C).		from -50 to +250°C	10 sec.	SKP 150
				
Compensated miniature male plug	Retractable cable lg. 450 mm, up to 2,4 m.			
■ With wire		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Visible welding.		from -50 to +250°C	5 sec.	FK-PFA-05-MM FK-PFA-1-MM FK-PFA-2-MM FK-PFA-5-MM FK-PFA-10-MM FK-PFA-25-MM
				
Compensated miniature male plug	Teflon cable 1,6 x 2,2 mm		Cable length FK-PFA-05-MM : lg. 0,5 m FK-PFA-1-MM : lg. 1 m FK-PFA-2-MM : lg. 2 m FK-PFA-5-MM : lg. 5 m FK-PFA-10-MM : lg. 10 m FK-PFA-25-MM : lg. 25 m	
■ Velcro		Measuring range	t_{63}	Ref.
Thermocouple K Class 1 (IEC 584-3 guideline). Velcro fixing for pipes Ø 100 mm max.		from -20 to +90°C	10 sec.	SKV 150 SKV 300 SKV 500
				
Compensated miniature male plug	PVC cable 2 m		Cable length SKV150 : lg. 1,5 m. SKV300 : lg. 3 m. SKV500 : lg. 5 m.	


■ Angled contact with lamella	Measuring range	t₆₃	Ref.
--------------------------------------	------------------------	-----------------------	-------------

Thermocouple K
Class 1 (IEC 584-3 guideline).
 Stainless steel sheath angled
 ABS handle (from -40 to +85°C).

from -50 to +250°C

t₆₃
 4
 sec.



SKCLC 150 A



Compensated miniature male plug



PVC cable 2 m

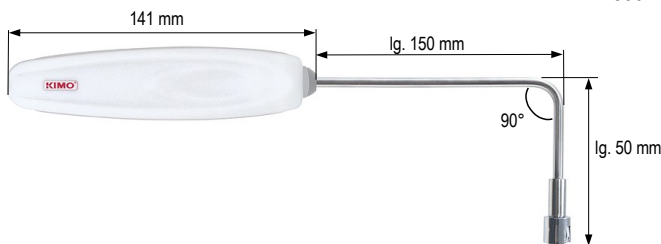

■ Corkscrew	Measuring range	t₆₃	Ref.
--------------------	------------------------	-----------------------	-------------

Thermocouple K
Class 1 (IEC 584-3 guideline).
 Stainless steel sheath and handle.
 Corkscrew tip. T-shape handle.

from -50 to +250°C

t₆₃
 10
 sec.



SKT 125



Compensated miniature male plug



Shielded Teflon cable 2 m




■ Food penetration T	Measuring range	t₆₃	Ref.
-----------------------------	------------------------	-----------------------	-------------

Thermocouple K
Class 1 (IEC 584-3 guideline).
 Stainless steel sheath and handle. With food penetration tip. T-shape handle.

from -50 to +250°C

t₆₃
 8
 sec.



SKT 125 A



Compensated miniature male plug



Shielded Teflon cable 2 m



■ Thermocouple T


■ General use	Measuring range	t₆₃	Ref.
----------------------	------------------------	-----------------------	-------------

Thermocouple T
Class 1 (IEC 584-3 guideline).
 Stainless steel sheath. ABS handle (from -40 to +85°C).


from -50 to +250°C

t₆₃
 12
 sec.


STG 250



Compensated miniature male plug



Retractable cable lg. 450 mm, up to 2,4 m.

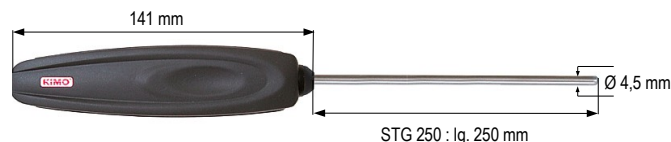


■ With wire	Measuring range	t₆₃	Ref.
--------------------	------------------------	-----------------------	-------------

Thermocouple T
Class 1 (IEC 584-3 guideline).
 Visible welding.

from -50 to +250°C

t₆₃
 5
 sec.

FT-PFA-05-MM
FT-PFA-1-MM
FT-PFA-2-MM
FT-PFA-5-MM
FT-PFA-10-MM
FT-PFA-25-MM



Compensated miniature male plug



Teflon cable insulated. 1,6 x 2,2 mm



Cable length
 FT-PFA-05-MM : lg. 0,5 m
 FT-PFA-1-MM : lg. 1 m
 FT-PFA-2-MM : lg. 2 mm
 FT-PFA-5-MM : lg. 5 m
 FT-PFA-10-MM : lg. 10 m
 FT-PFA-25-MM : lg. 25 m



■ General use	Measuring range	t₆₃	Ref.
----------------------	------------------------	-----------------------	-------------

Thermocouple T
Class 1 (IEC 584-3 guideline).
 Stainless steel sheath. ABS handle (from -40 to +85°C).

from -50 to +250°C

t₆₃
 12
 sec.


STG 150 A
STG 250 A









Compensated miniature male plug

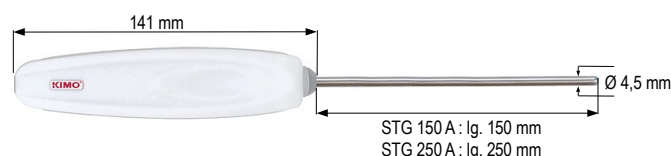

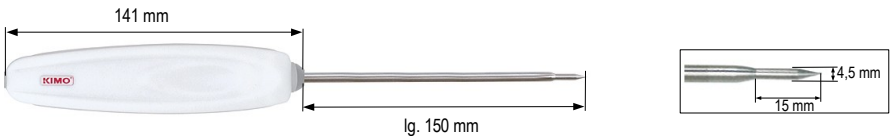


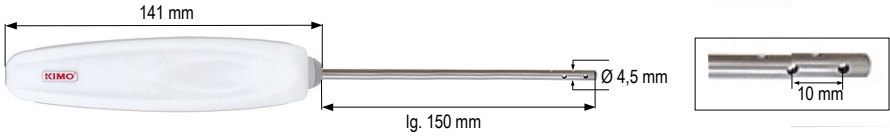


PVC cable 2 m



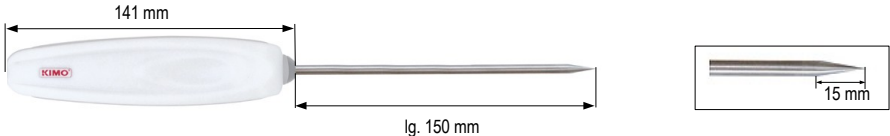


■ Ambient	Measuring range	t_{63}	Ref.
Thermocouple T Class 1 (IEC 584-3 guideline). Stainless steel sheath with ambient end. ABS handle (from -40 to +85°C).	from -50 to +250°C	10 sec.	STA 150 A
  			
Compensated miniature male plug	PVC cable 2 m		


■ Penetration	Measuring range	t_{63}	Ref.
Thermocouple T Class 1 (IEC 584-3 guideline). Stainless steel sheath with pointer tip. ABS handle (from -40 to +85°C).	from -50 to +250°C	10 sec.	STP 150 A
  			
Compensated miniature male plug	PVC cable 2 m		


■ Food penetration	Measuring range	t_{63}	Ref.
Thermocouple T Class 1 (IEC 584-3 guideline). Stainless steel sheath. Food penetration tip. ABS handle (from -40 to +85°C).	from -50 to +250°C	8 sec.	STPA 150 A
  			
Compensated miniature male plug	PVC cable 2 m		

■ Corkscrew	Measuring range	t_{63}	Ref.
Thermocouple T Class 1 (IEC 584-3 guideline). Stainless steel sheath and handle. Corkscrew tip. T-shape handle.	from -50 to +250°C	10 sec.	STT 125
  			
Compensated miniature male plug	Shielded Teflon cable 2 m		

■ Food penetration T	Measuring range	t_{63}	Ref.
Thermocouple T Class 1 (IEC 584-3 guideline). Stainless steel sheath and handle. Food penetration tip. T-shape handle.	from -50 to +250°C	8 sec.	STT 125 A
  			
Compensated miniature male plug	Shielded Teflon cable 2 m		

Extensions

■ For Thermocouple K	Ref.
Extension cable for thermocouple K Class 1 with compensated miniature plug and socket.	 CD-K-PB-1.5-CMM-CMF : Length 1,5 m CD-K-PB-3-CMM-CMF : Length 3 m CD-K-PB-5-CMM-CMF : Length 5 m
	CD-K-PB-1.5-CMM-CMF CD-K-PB-3-CMM-CMF CD-K-PB-5-CMM-CMF

■ For Thermocouple T	Ref.
Extension cable for thermocouple T Class 1 with compensated miniature plug and socket.	 CD-T-PB-1.5-CMM-CMF : Length 1,5 m CD-T-PB-3-CMM-CMF : Length 3 m CD-T-PB-5-CMM-CMF : Length 5 m
	CD-T-PB-1.5-CMM-CMF CD-T-PB-3-CMM-CMF CD-T-PB-5-CMM-CMF

■ Contact with lamella

Measuring range

t_{63}

Ref.

Thermocouple K


Class 1 (IEC 584-3 guideline).

Stainless steel sheath. ABS handle (from -40 to +85°C).

from -50 to +250°C

4
sec.



SKCL 150 A



Compensated miniature male plug



PVC cable 2 m

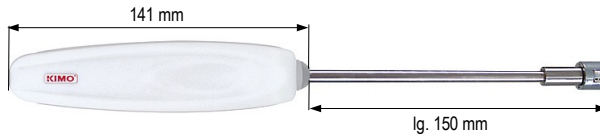

www.kimo.fr

EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr



Distributed by :